
ΠΙΥΟΤΑ

Cal. JP15 / 25 MULTIFUNCTION



1. Basic Specification

Calibre		JP15		JP25
Ligne		12 1/2"		
Overall diamete		Ф28.2×26.0(3Н-9Н)		
Case fitting diame	ter	Ф27.6×26.0(3Н-9Н)		
Total height		4.30mm		
Battery Life		Approx.2years		
Battery		SILVER OXIDE SR621SW or equivalent		
Second hand Other small h	32,768Hz ±20 second of hand > Max. 0.4μN.m Max. 0.09μN. ands Max. 0.0	.m	orn unde	r normal circumstances
Powercell Sav Over-loading	24Hours Dua ring Reset Mea Compensatior	I time display by chanism(PSRM) n Device(OLCD) DFC) for time adju		of hands

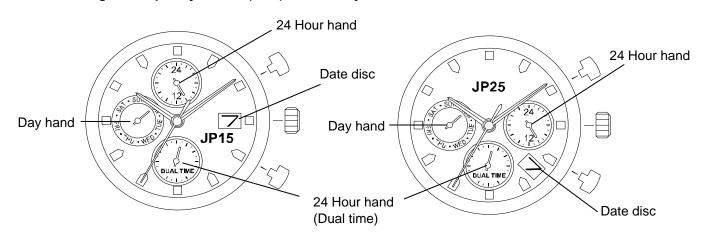


2. Separated Parts

Setting stem	065- 505 × 1
Length from movement center to far end of setting stem	20.03mm
Thread	Ф0.9mm×11.68mm

3. Others

* Measurement of time rate

The unit(gate) time of measurement must be set at "10 sec." or integer fold value of 10 sec. Owing to the DFC system, and the measurement must be performed in the form of complete watch.




JAPAN MIYOTA CO. (CAL. NO.) NO JEWELS

* Typical clearance

Mov't - Caseback minimum 150 microns Top of hands - Glass 300 - 400 microns * * subject to the glass, case structure, and the length of hand

4. Instruction Manual

[Displays and Buttons]

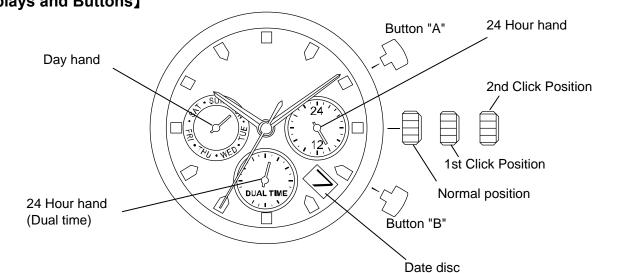

A) SETTING THE DAY

- 1. Pull the crown out to the 2nd Click Position.
- 2. Turn the crown clockwise to set the day.
- 3. After the day has been set, push the crown back to the Normal position.
- * The day is changed during the period from 0AM to 5AM.

B) SETTING THE DATE

- 1. Pull the crown out to the 1st Click Position.
- 2. Turn the crown clockwise to set the date.
 - * If the date is set between the hours of around 9:00 PM and 1:00 AM, the date may not change on the following day.
- 3. After the date has been set, push the crown back to the Normal position.

C) SETTING THE TIME

- 1. Pull the crown out to the 2nd Click Position.
- 2. Turn the crown clockwise to set hour and minute hands.
- 3. After the time has been set, push the crown back to the Normal position.

D) SETTTING THE DUAL TIME


Press button "A" to set the dual time hand forward in units of 15 minutes.


Press button "B" to set the dual time hand back in units of 15 minutes.

*The dual time hand can be put rapidly by continuously pressing button "A" or "B".


These specifications might be changed without prior notice.

CITIZEN WATCH CO., LTD.

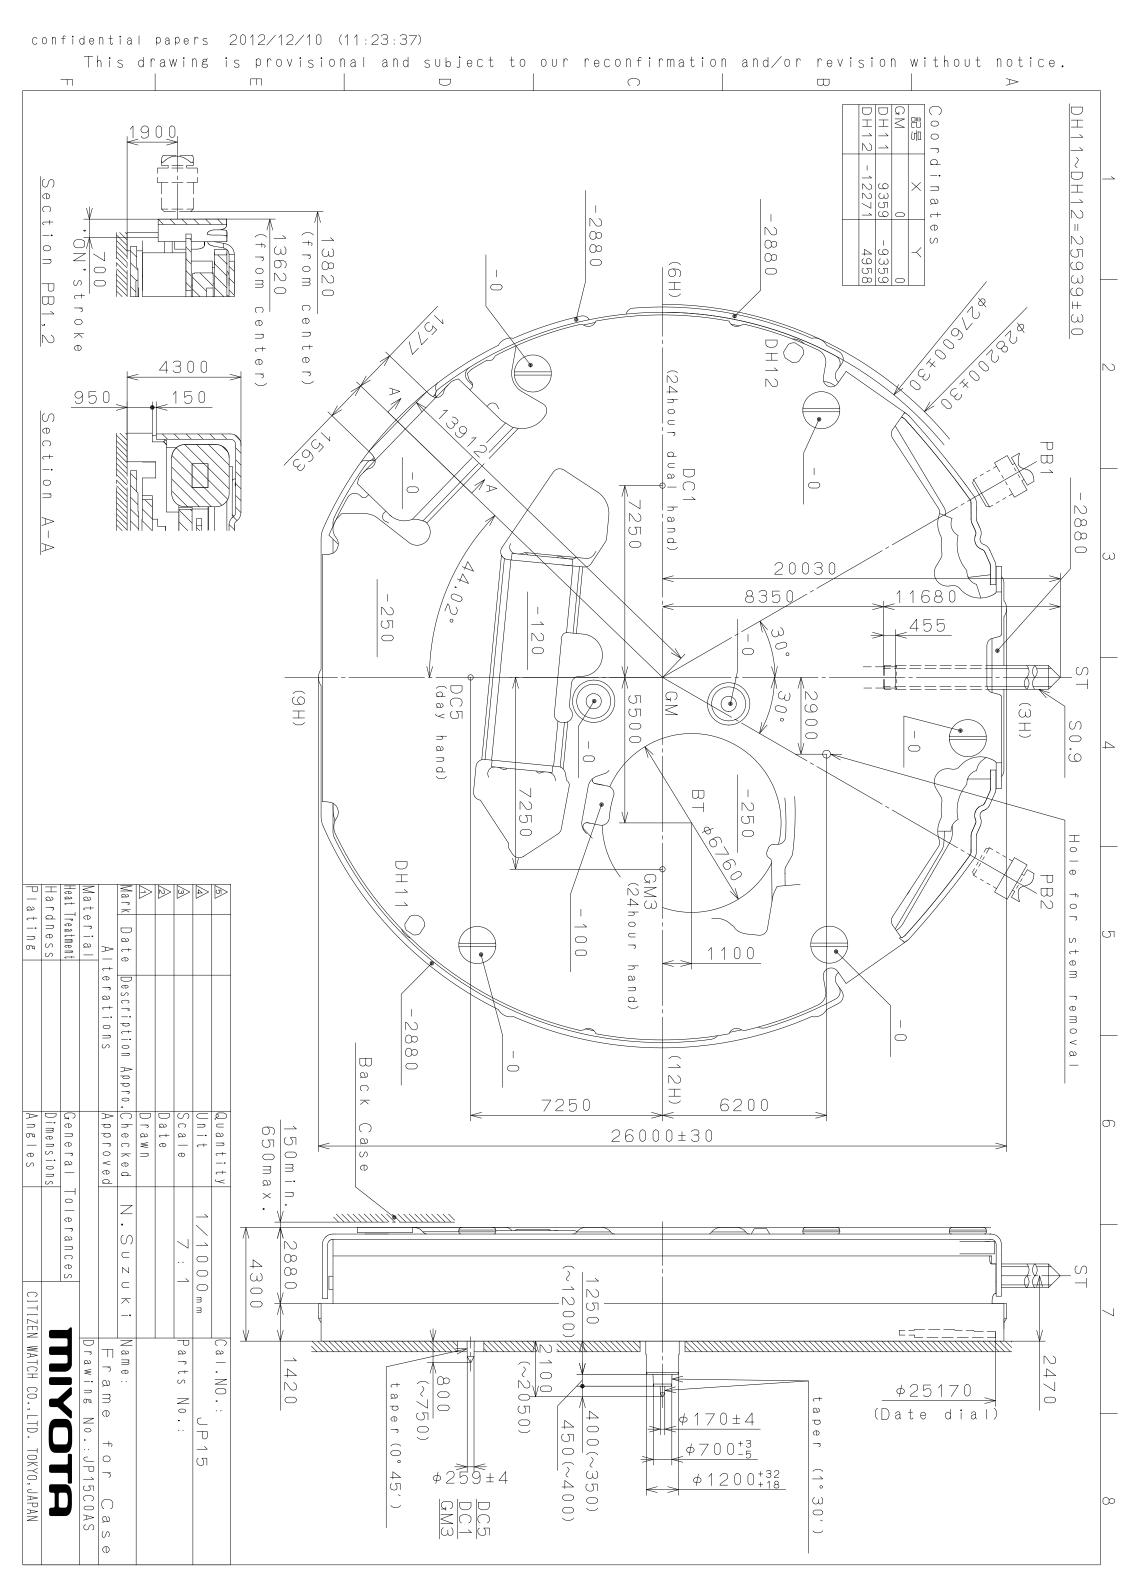


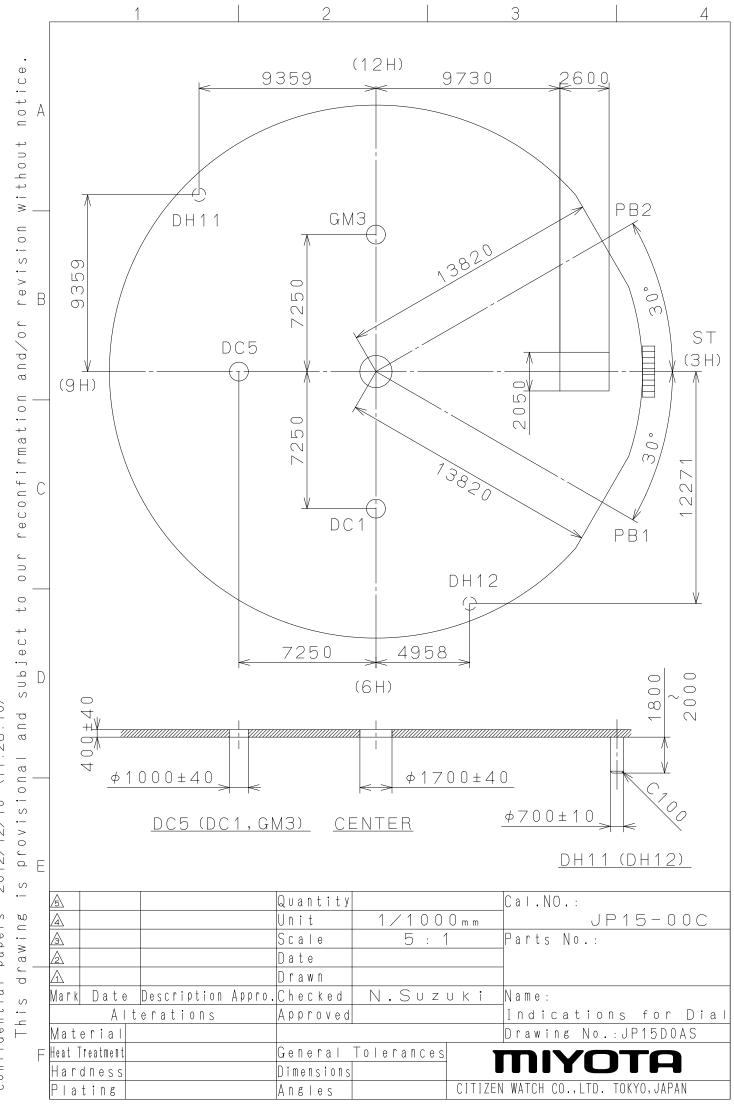


confidential papers 2012/12/10 (11:26:10)

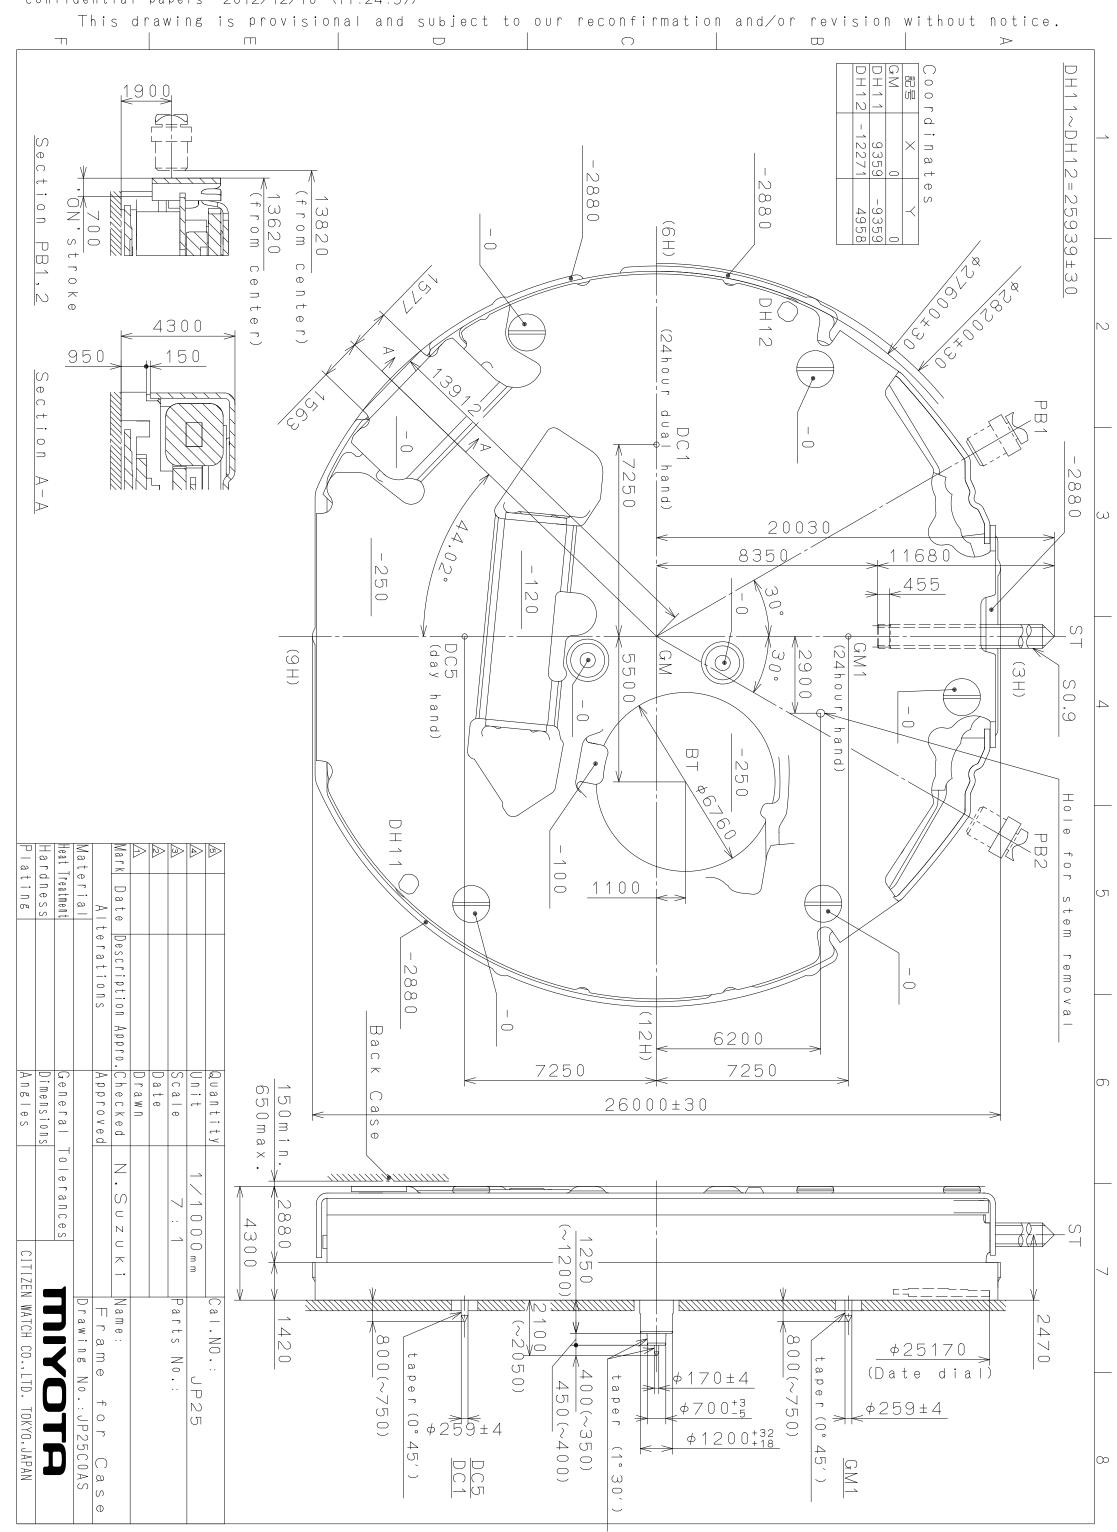


confidential papers 2012/12/10 (11:24:57)

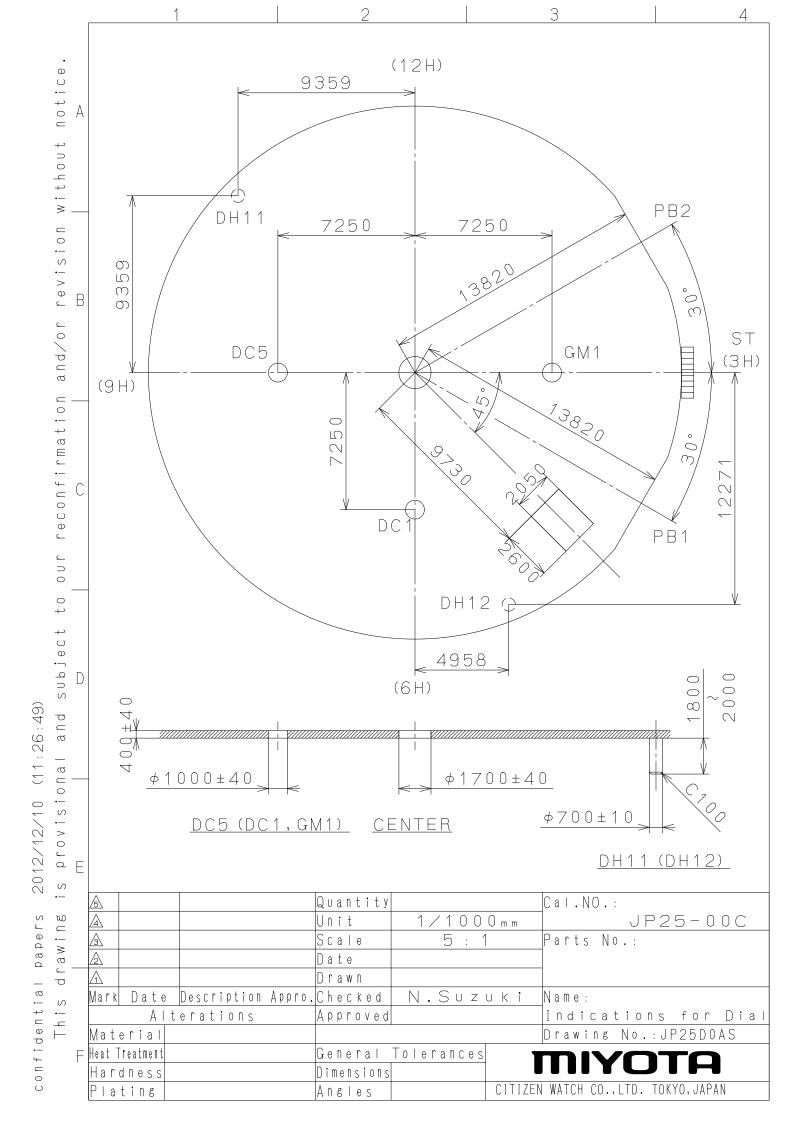


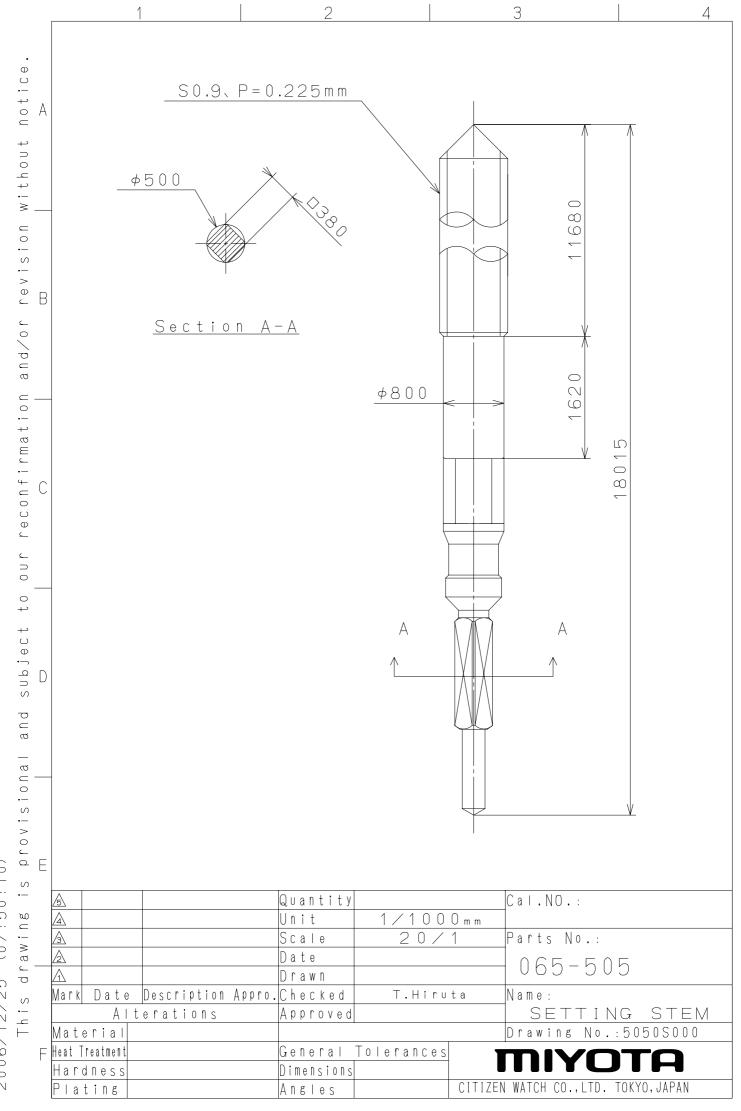


2006/12/25 (07:50:10)

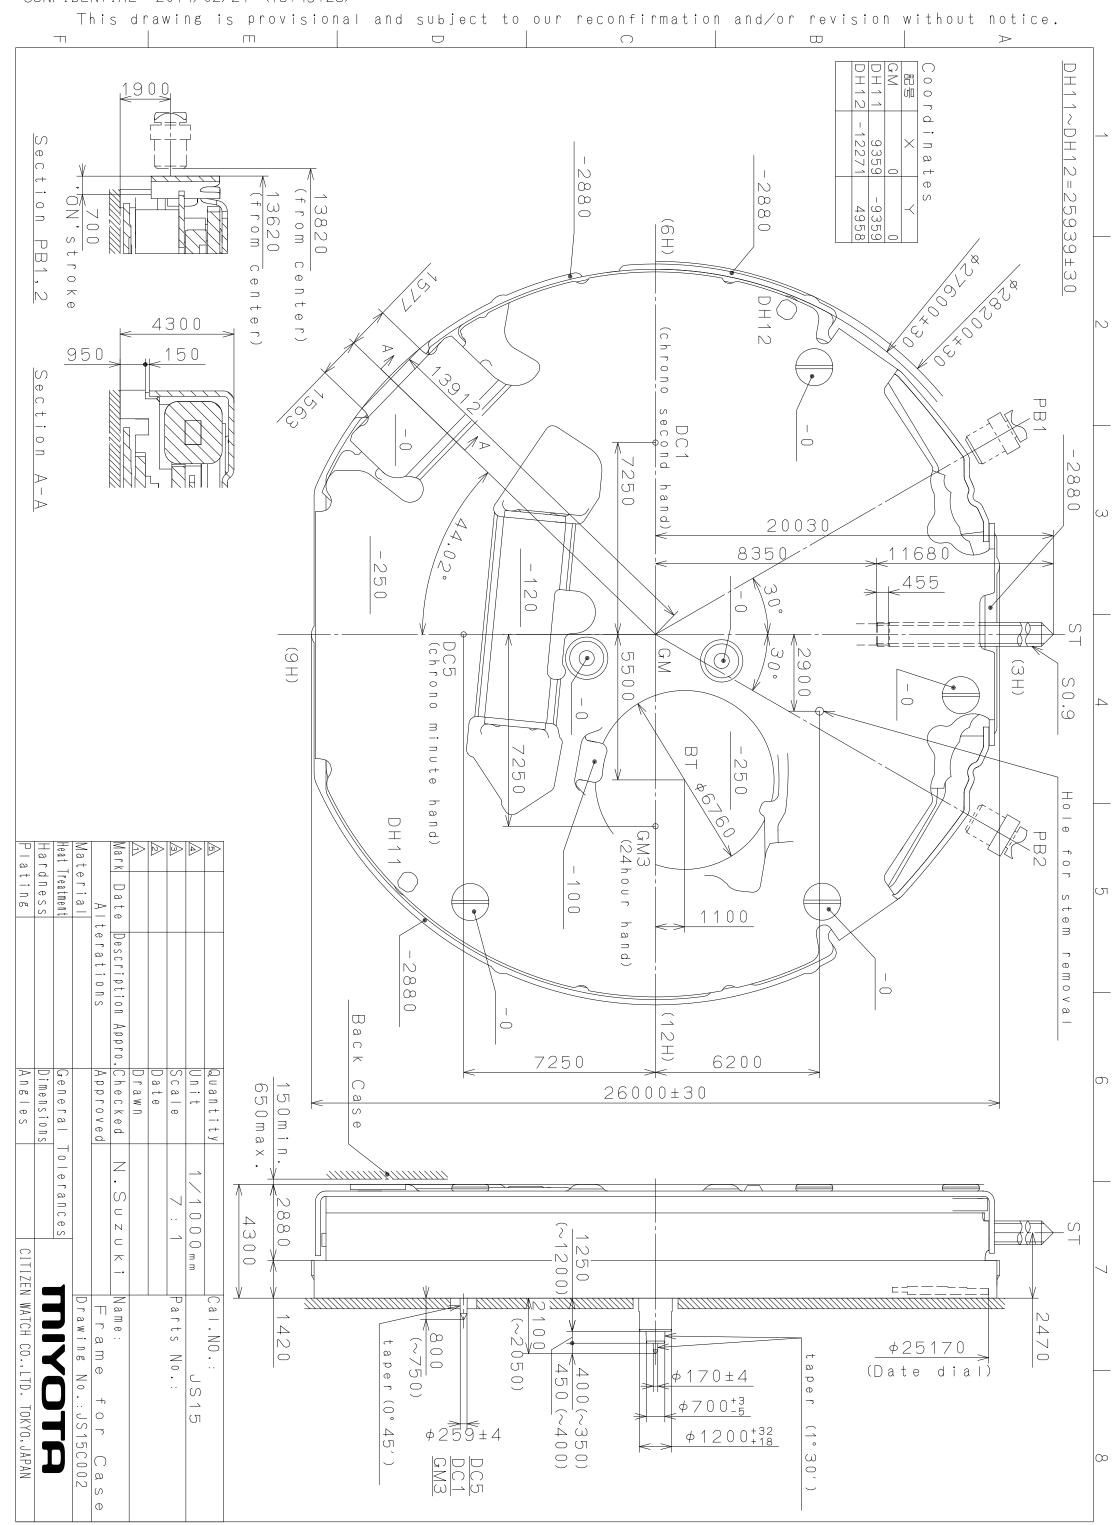

CONFIDENTIAL 2014/02/21 (16:49:28)

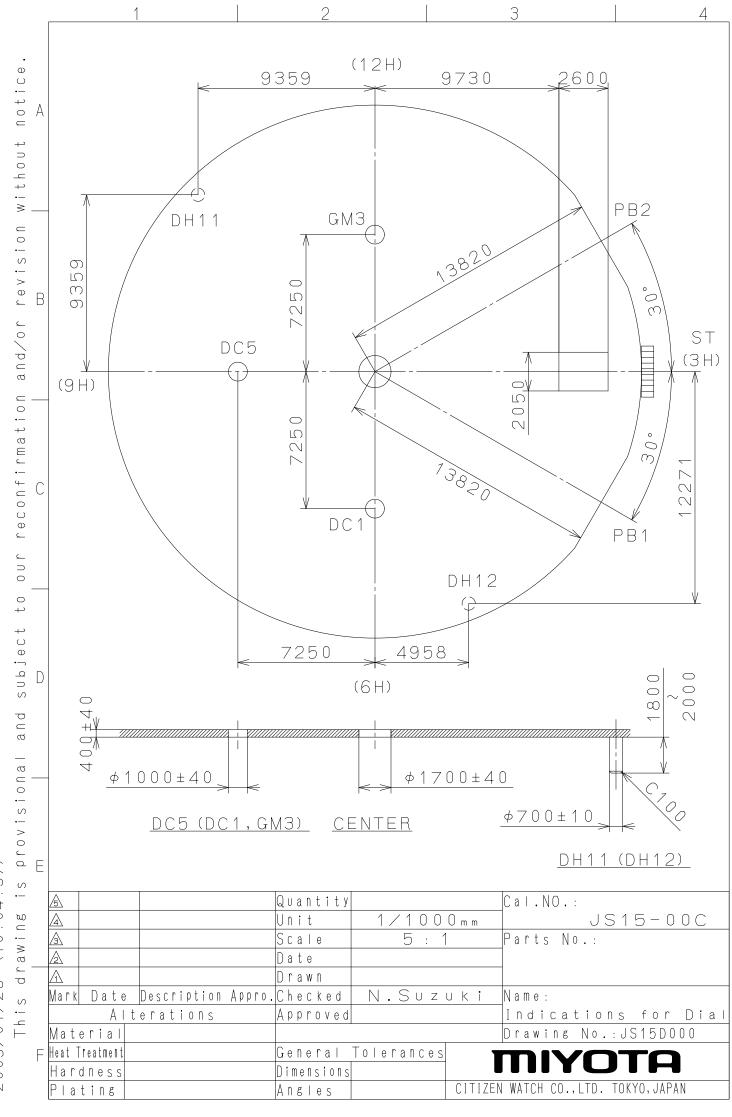

2009/01/26 (10:04:37)

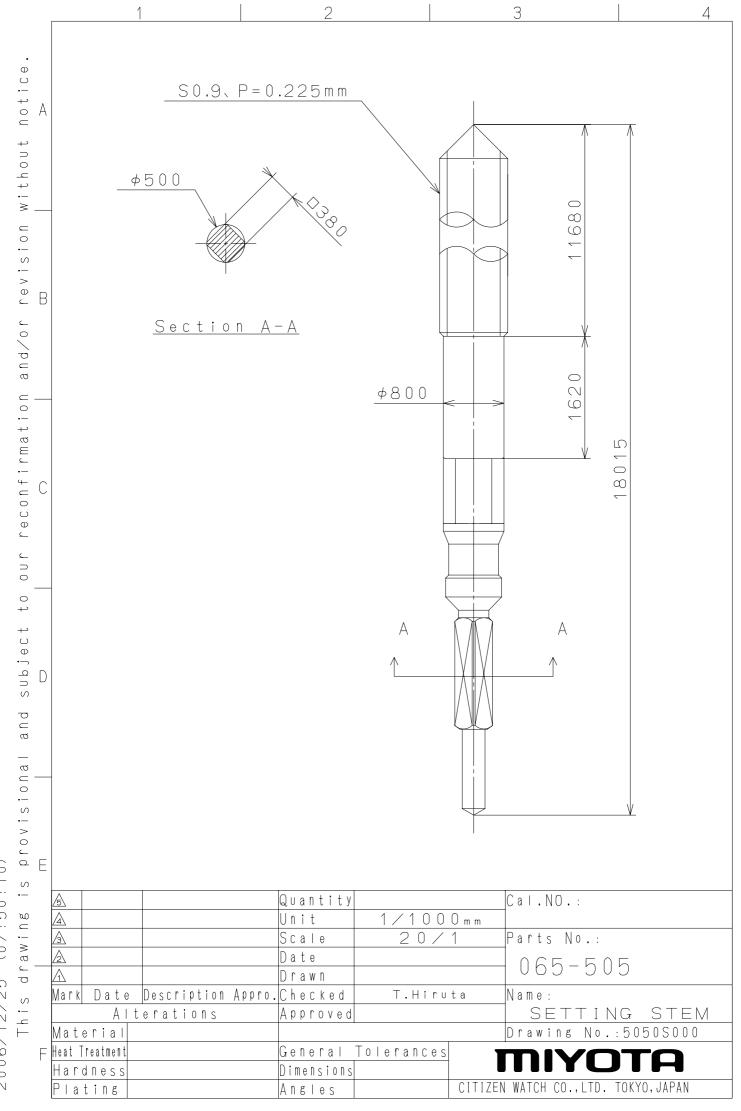

2006/12/25 (07:50:10)