

Size

<ligne>

13 1/2'''

Height

<mm>

4.13

Accuracy

<per Month>

±20 sec

Battery Life

2 years

\*60 minutes chronograph operation per day

Battery consumption could be minimum by pulling out the stem (=Power-Saving)


Balance Weight

<μN.m>

Minute 0.40  
Second 0.11  
Small 0.02


Featured by Shock Detection

Clearance



Original Package

500 pcs

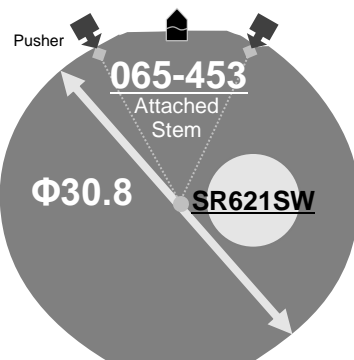

Center Chronograph



Chronograph Second



1/100 Sec Chronograph



Small Second 1/20 Sec Chronograph



Chronograph Hour





Chronograph Minute



60



24 Hour

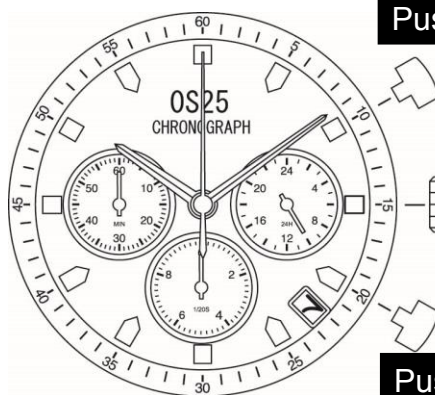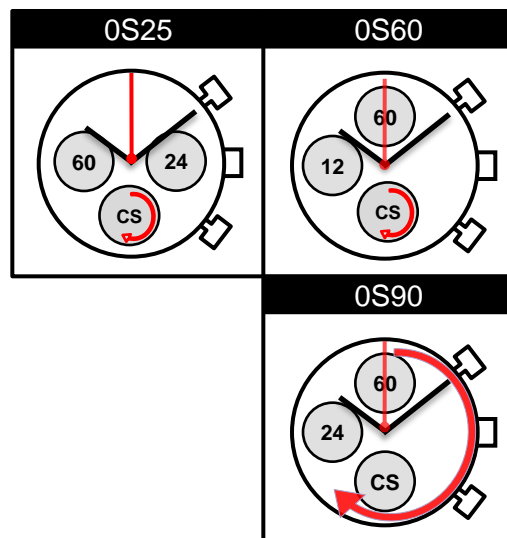

Push "A"

Start and Stop the chronograph

Setting the Time

Set CHRONOGRAPH hands to reset

Setting the Date

Push "B"




Reset the chronograph

DO NOT set Date between 9:00pm - 1:00am

Push A to reset the hands at the zero position. And continue to push A to put them forward


This drawing is provisional and subject to our reconfirmation and/or revision without notice.

DH1~DH2=25816 (±20)			
Stroke for PB must be minimum 600 [ $+200$ ] $\mu$ m			
Coordinates			
Mark	X	Y	R
GM	0	0	—
DH1	3000	13000	—
DH2	2100	-12800	—
a1	3441	14908	430
a2	1865	15186	430
a3	-15151	2129	430
a4	-15291	535	430
a5	10434	-11190	430
a6	9208	-12219	430

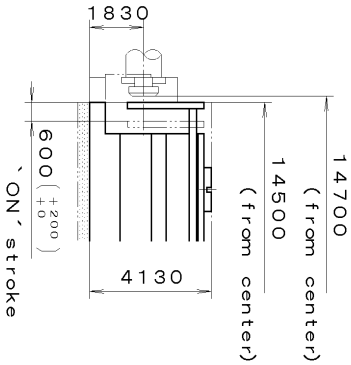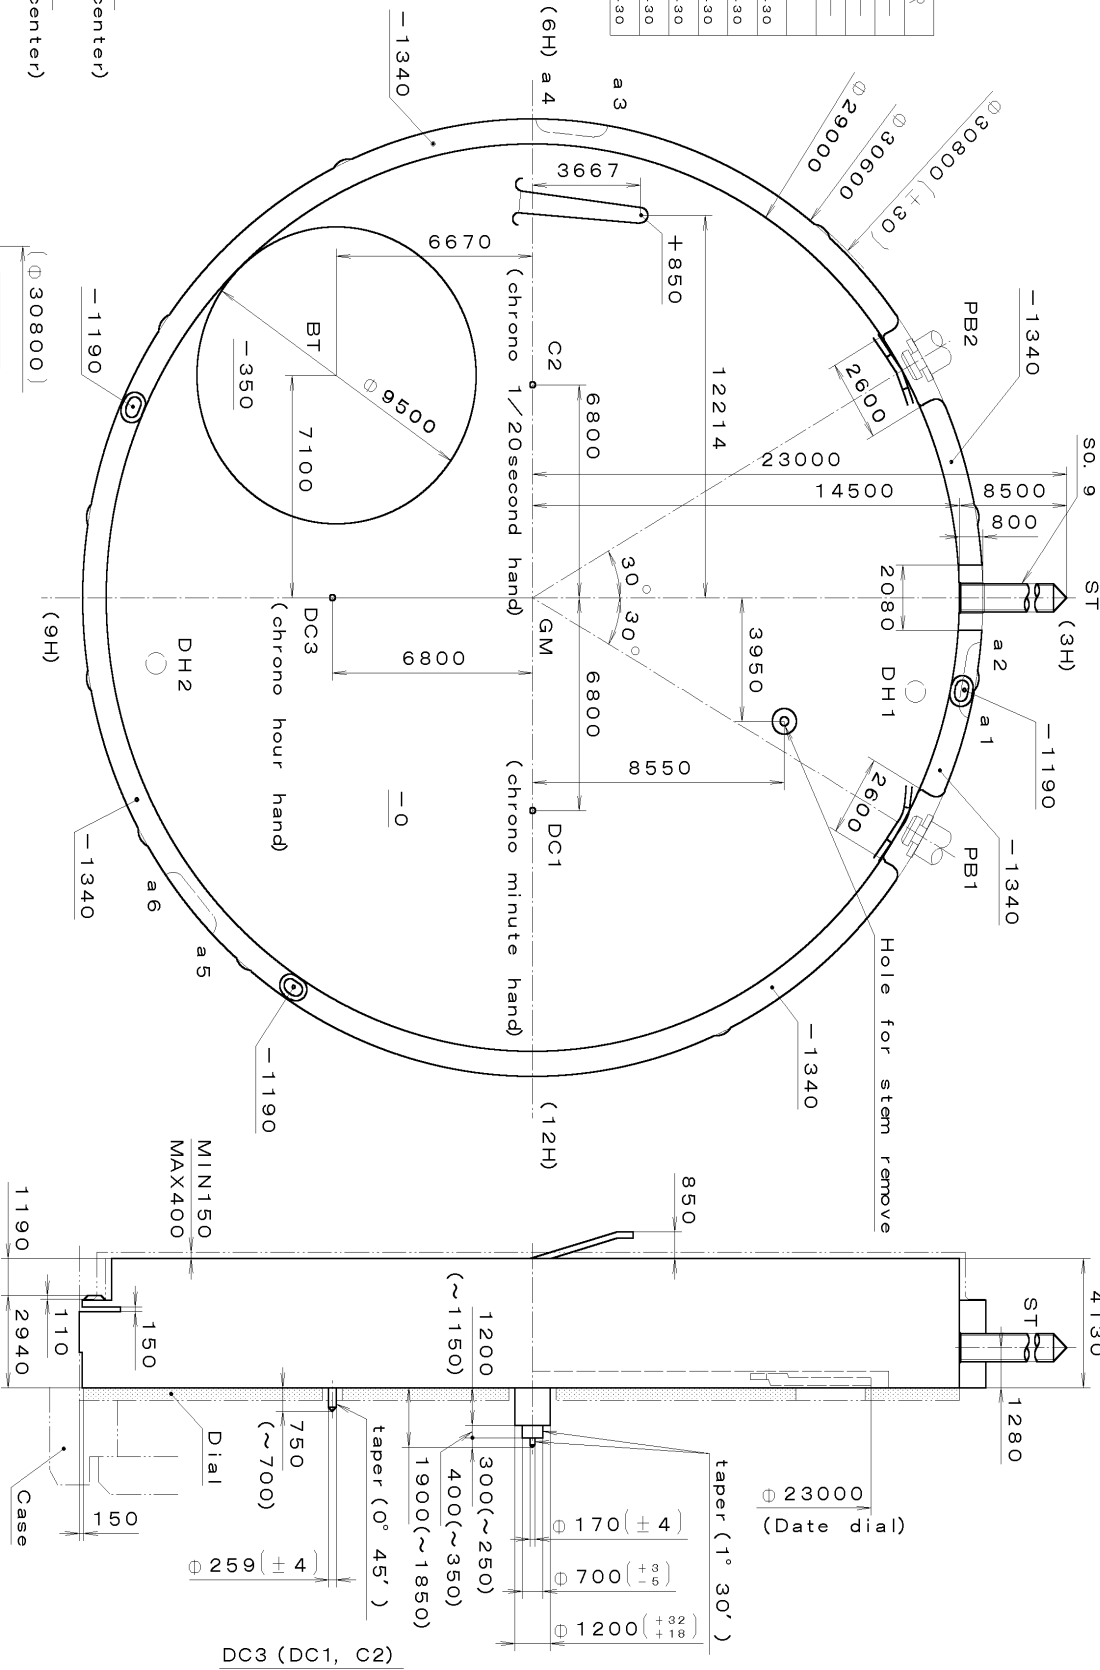

Quantity	Unit	1/1000 mm	Cal. No. : OS60
Scale	6:1		Parts:
Date			
Drawn			
Checked			
Approved			
Material			Name:
Heat Treatment			Frame for Case
Hardness			Drawing No. : OS60C000
Plating			
General Tolerances			
Dimensions			
Angles			


```
*** TIPW OS10-00A (01) *** (2100 1121) 00-07-05
```

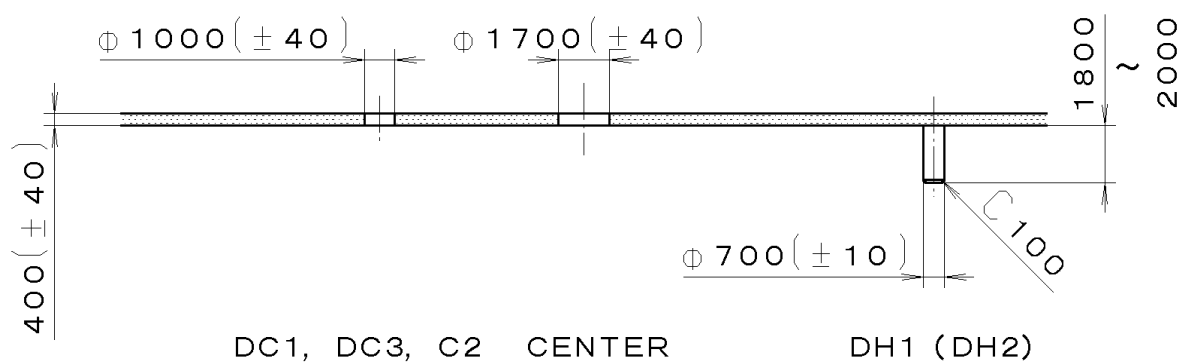

7			Quantity		Cal. No. : OS10-00A OS60-00A
6			Unit	1/1000 mm	
5			Scale	4:1	
4			Date		Parts:
3			Drawn		
2			Checked	T. Hiruta	
1			Approved		Name : Indications for Dial
Material					Drawing No. : OS10D000
Heat Treatment			General Tolerances		
Hardness			Dimensions		
Plating			Angles		


This drawing is provisional and subject to our reconfirmation and/or revision without notice.

\*\*\* TIPW OS10-00S (01) \*\*\* (2100 1121 ) 00-07-05 30.5

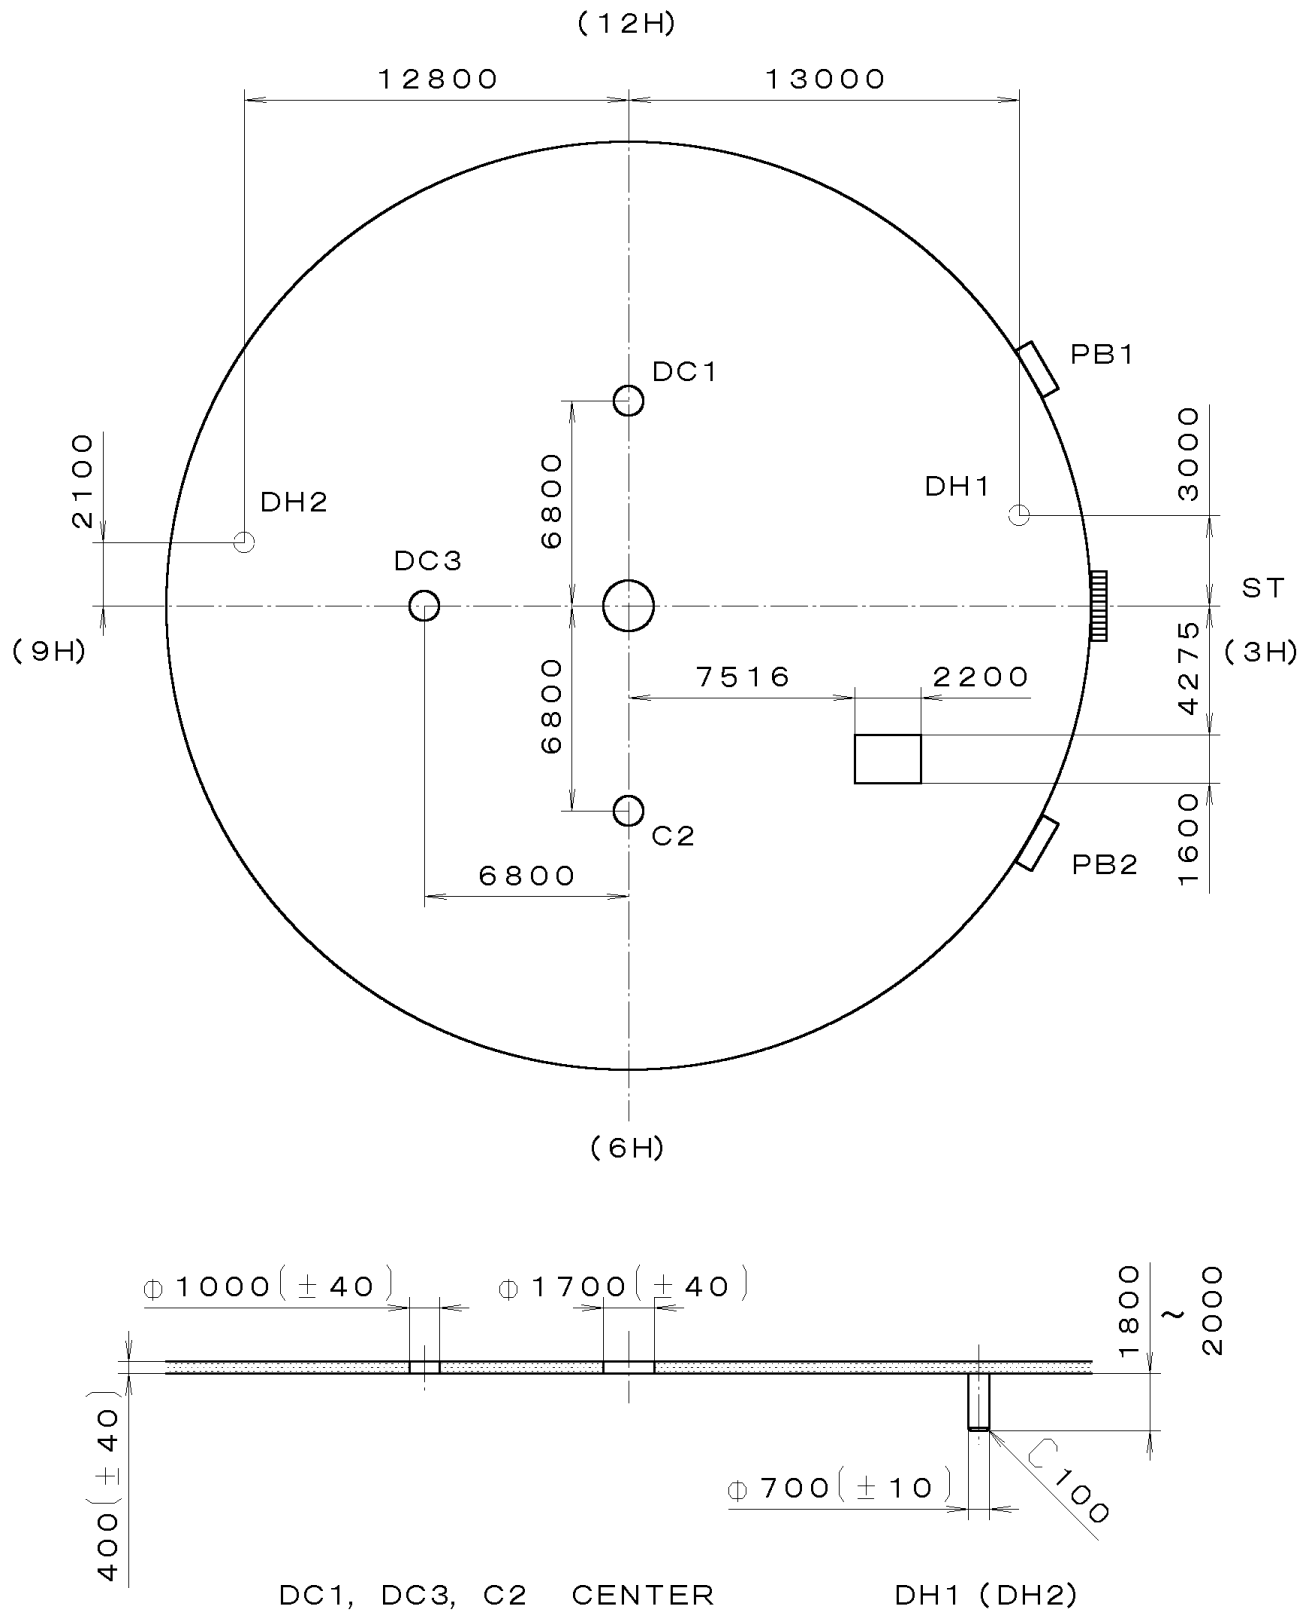


7			Quantity		Cal. No. : OS10-00S
6			Unit	1/1000 mm	OS60-00S
5			Scale	4:1	Parts:
4			Date		
3			Drawn		
2			Checked	T. Hiruta	Name:
1			Approved		Indications for Dial
Material					Drawing No. : OS10D010
Heat Treatment			General Tolerances		
Hardness			Dimensions		
Plating			Angles		

```
*** TIPW 0S10-00U (01) *** (2100 1121) 00-07-05
```

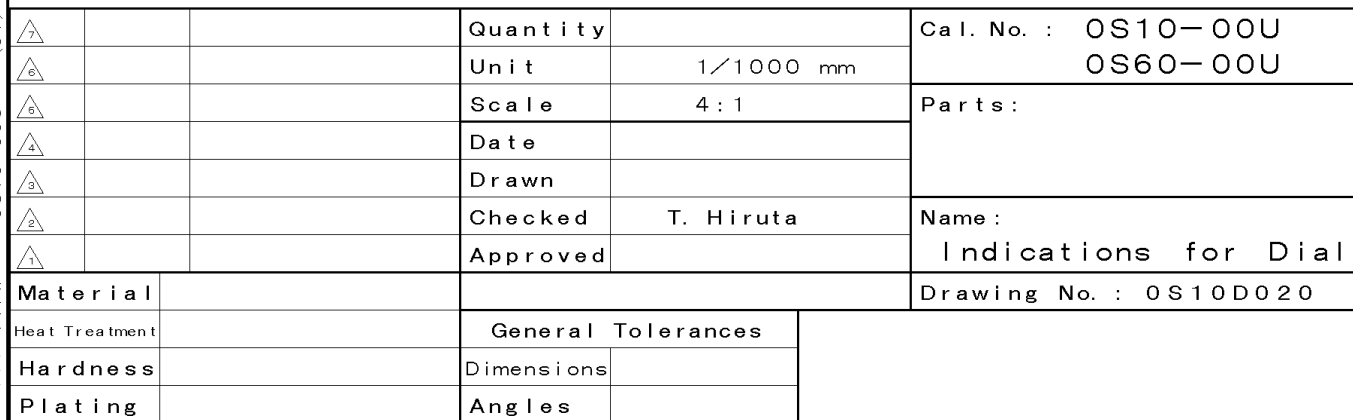

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

\*\*\* T I P W (01) \*\*\* (2100 1121 ) 00-07-06



Section A-A

S0. 9, P=0. 225mm

1000

8500

5500

18785

A

A

7			Quantity		Cal. No. :
6			Unit	1/1000 mm	
5			Scale	20:1	Parts:
4			Date		065-453
3			Drawn		
2			Checked	T. Hiruta	Name:
1			Approved		SETTING STEM
Material					Drawing No. : 4530S000
Heat Treatment			General Tolerances		
Hardness			Dimensions		
Plating			Angles		