

0S30

MIYOTA

Size
<ligne>

13 1/2'''

Height
<mm>

4.13

Accuracy
<per Month>

±20 sec

Battery Life

5 years

*60 minutes chronograph operation per day

Battery consumption could be minimum
by pulling out the stem (=Power-Saving)

Balance Weight
<μN.m>


Minute 0.40

Second 0.11

Small 0.02





Featured by Shock Detection

Clearance



Original Package

500 pcs

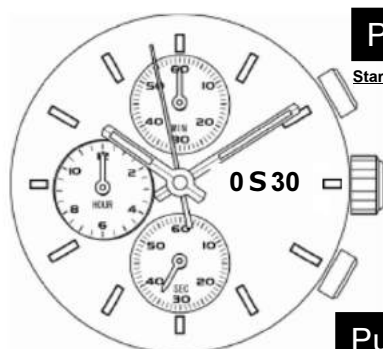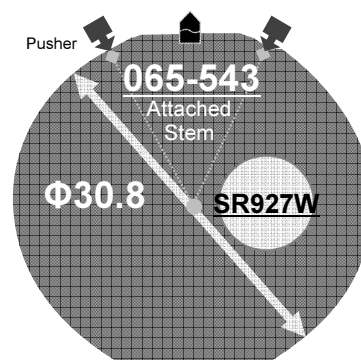

Push "A"

Start and Stop the chronograph

Push "B"

Reset the chronograph

Setting the Time

Set CHRONOGRAPH hands to reset


Push A to reset the hands position to the ZERO position,
And continue to push A to put them forward

Stroke for PB must be minimum 600 [$+^{200}_{+0}$] μm

Coordinates			
Mark	X	Y	R
GM	0	0	—
DH1	3000	13000	—
DH2	2100	-12800	—
a1	3441	14908	430
a2	1865	15186	430
a3	-15151	2129	430
a4	-15281	535	430
a5	10434	-11180	430
a6	9208	-12219	430

Section PB1, 2


Section a1~a6

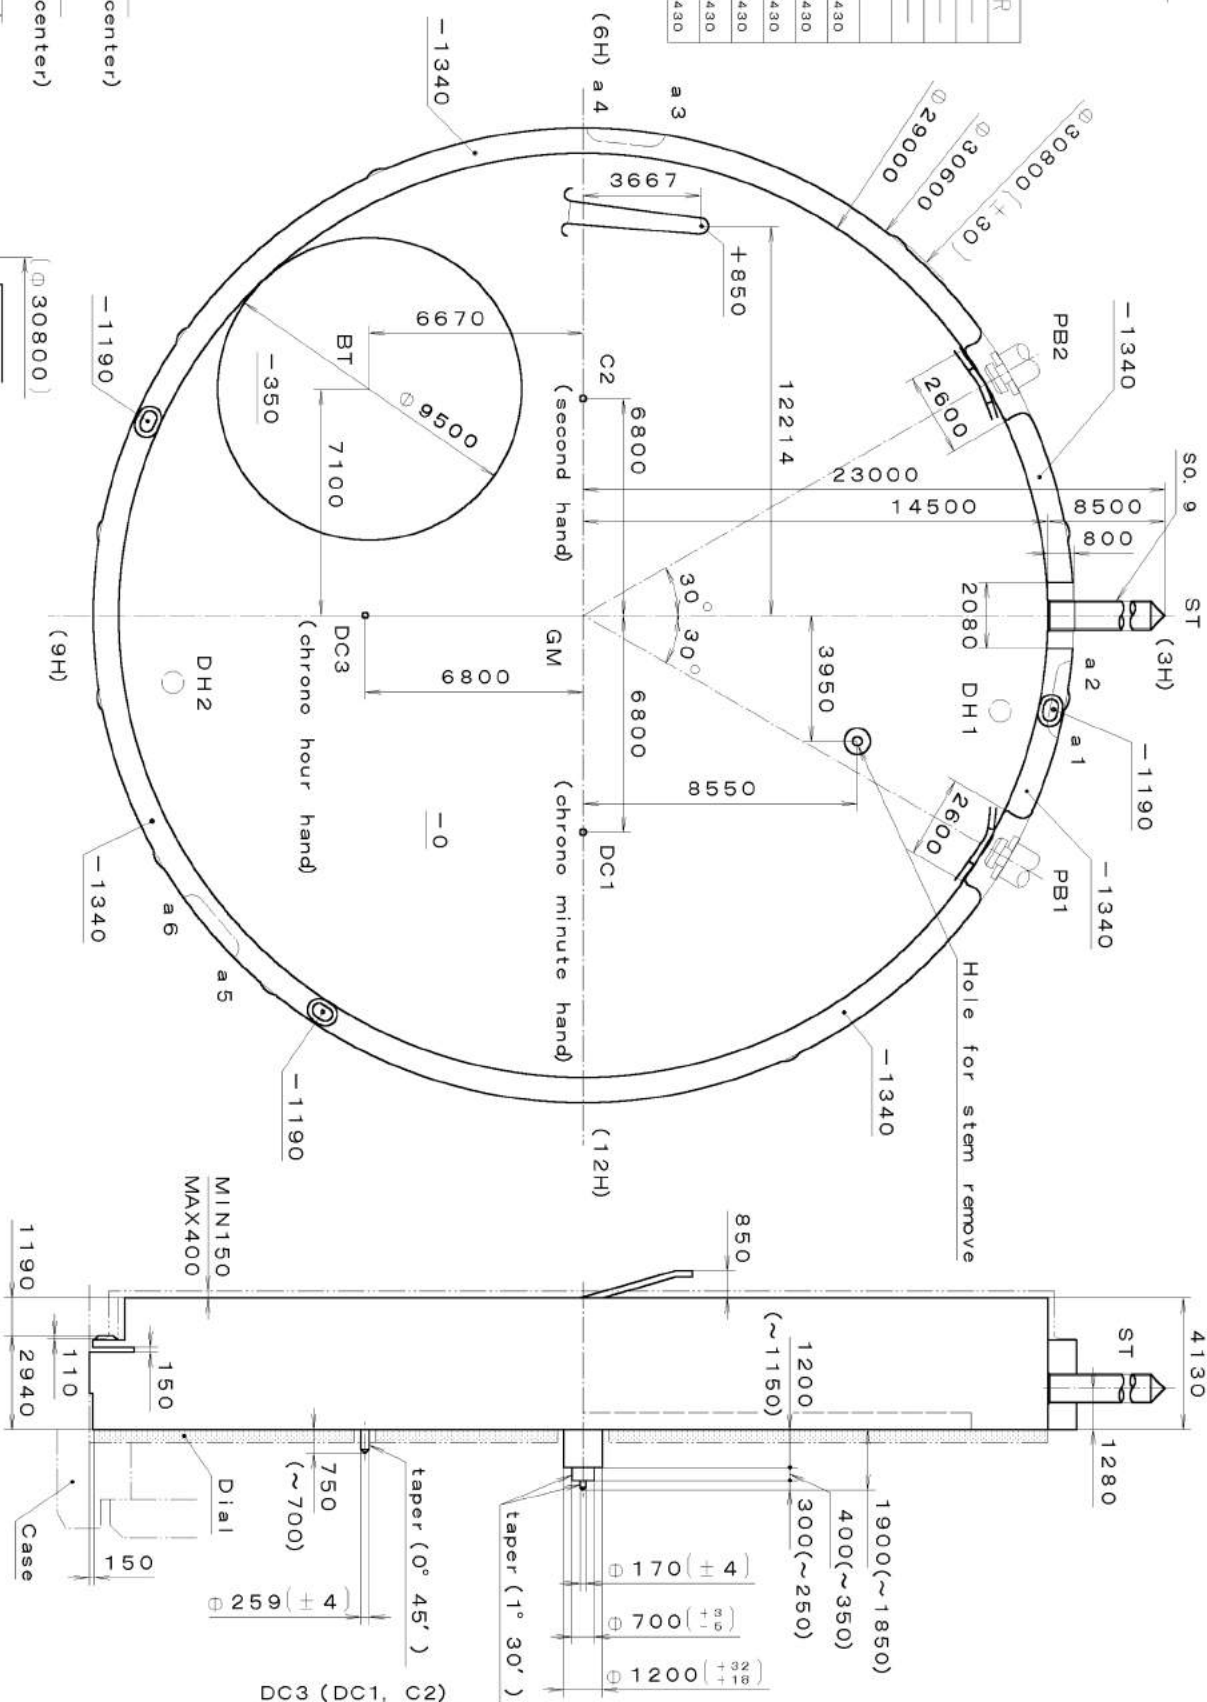

Cal. No. : OS30		
Parts :		
Quantity	Unit	1/1000 mm
Scale	6:1	
Date		
Drawn		
Checked	T. Hiruta	
Approved		
Material		
Heat Treatment		
Hardness		
Plating		
General Tolerances		
Dimensions		
Angles		
<div> <div> Name: Frame for Case Drawing No. : OS30C000 </div> <div> myoTA </div> </div>		

This drawing is provisional and subject to our reconfirmation and/or revision without notice.


00-07-03
(2100.1121)
0S30-00A (01) ***
*** TIPW

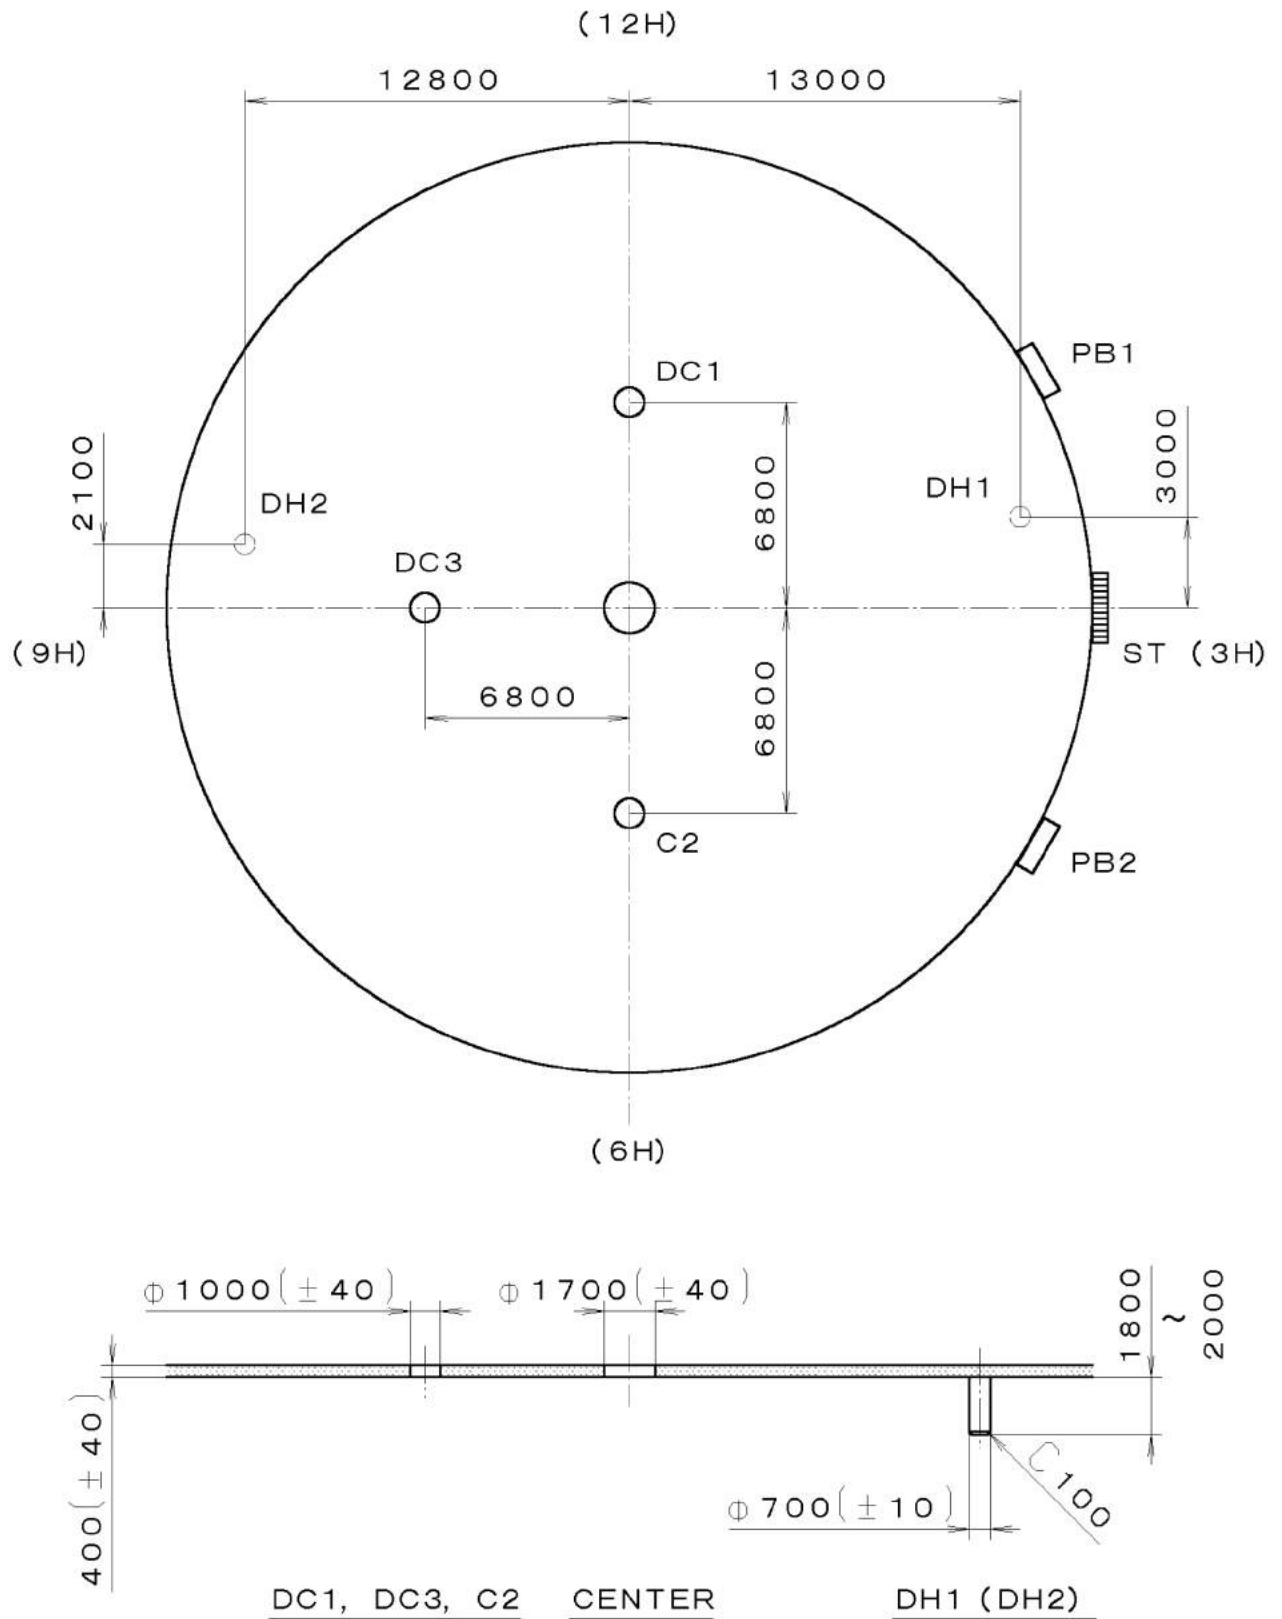

7			Quantity		Cal. No. : 0S30-00A
6			Unit	1/1000 mm	
5			Scale	4:1	Parts:
4			Date		
3			Drawn		
2			Checked	T. Hiruta	Name :
1			Approved		Indications for Dial
Material					Drawing No. : 0S30D000
Heat Treatment			General Tolerances		MIYOTA
Hardness			Dimensions		
Plating			Angles		

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

065-453 (01) *** (2100.1121) 00-07-05



Section A-A

S0. 9, P=0. 225mm

1000

8500

5500

18785

A

A

<div>7</div>			Quantity		Cal. No. :
<div>6</div>			Unit	1/1000 mm	
<div>5</div>			Scale	20:1	
<div>4</div>			Date		Parts: 065-453
<div>3</div>			Drawn		
<div>2</div>			Checked	T. Hiruta	
<div>1</div>			Approved		Name: SETTING STEM
Material					Drawing No. : 4530S000
Heat Treatment			General Tolerances		MIYOTA
Hardness			Dimensions		
Plating			Angles		