


Cal. 2036/2039/2033/203A

High Hand series of Cal.2035

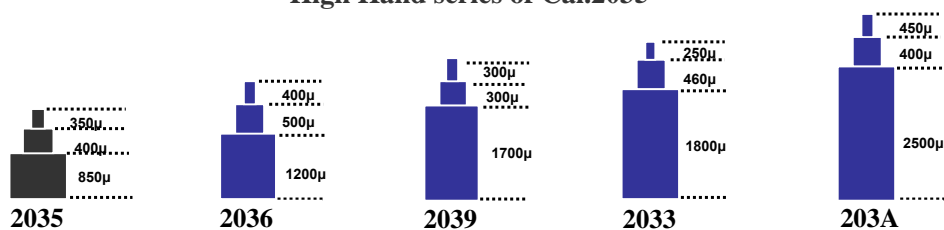

1. Basic Specification

Calibre	2036	2039	2033	203A
Ligne	6-3/4 x 8'''			
Total height	3.15mm			
Hands	3			
Battery life	3 Years			

< Time Standard >

Type of quartz: Tuning fork type quartz crystal
 Frequency : 32,768Hz
 Accuracy : ±20 second / month worn under normal circumstances

< Battery >

Type of battery: Silver oxide SR626SW or equivalent

< Others >

Driving system: Two-pole stepping motor
 Jewel : No jewels

< Additional Mechanisms >

Second hand stopping at optional position
 Powercell saving reset mechanism
 Over-loading compensation device

< Balanceable weight of hand >

Minute hand Max. 0.4 μN.m
 Second hand Max. 0.07 μN.m

2. Separated Parts

Calibre	2036	2039	2033	203A
Setting stem	065-468			

3. Remarks

< Setting stem >

Length of movement center to stem end : 20.0mm
 Thread : Φ0.9mm x 12.38mm

< Measurement of time >

The unit time of measurement must be set at "10s" or integer fold value of 10s owing to the DFC system. And the measurement must be carried out in state of a complete watch.

< Marking on movement >

UNADJUSTED
 (CAL NO.)
 MIYOTA CO., JAPAN

< Typical clearance >


Between case and movement
 Battery strap - Case back : 150 - 300 μm
 Hands - glass : 300 - 450 μm*

* Depending and subject to the glass and case structure, and hand length.

These specifications might be changed without prior notice.

This drawing is provisional and subject to our reconfirmation and/or revision without notice

*** T1PW 2035 (01) *** (2100 1121) 00-10-13

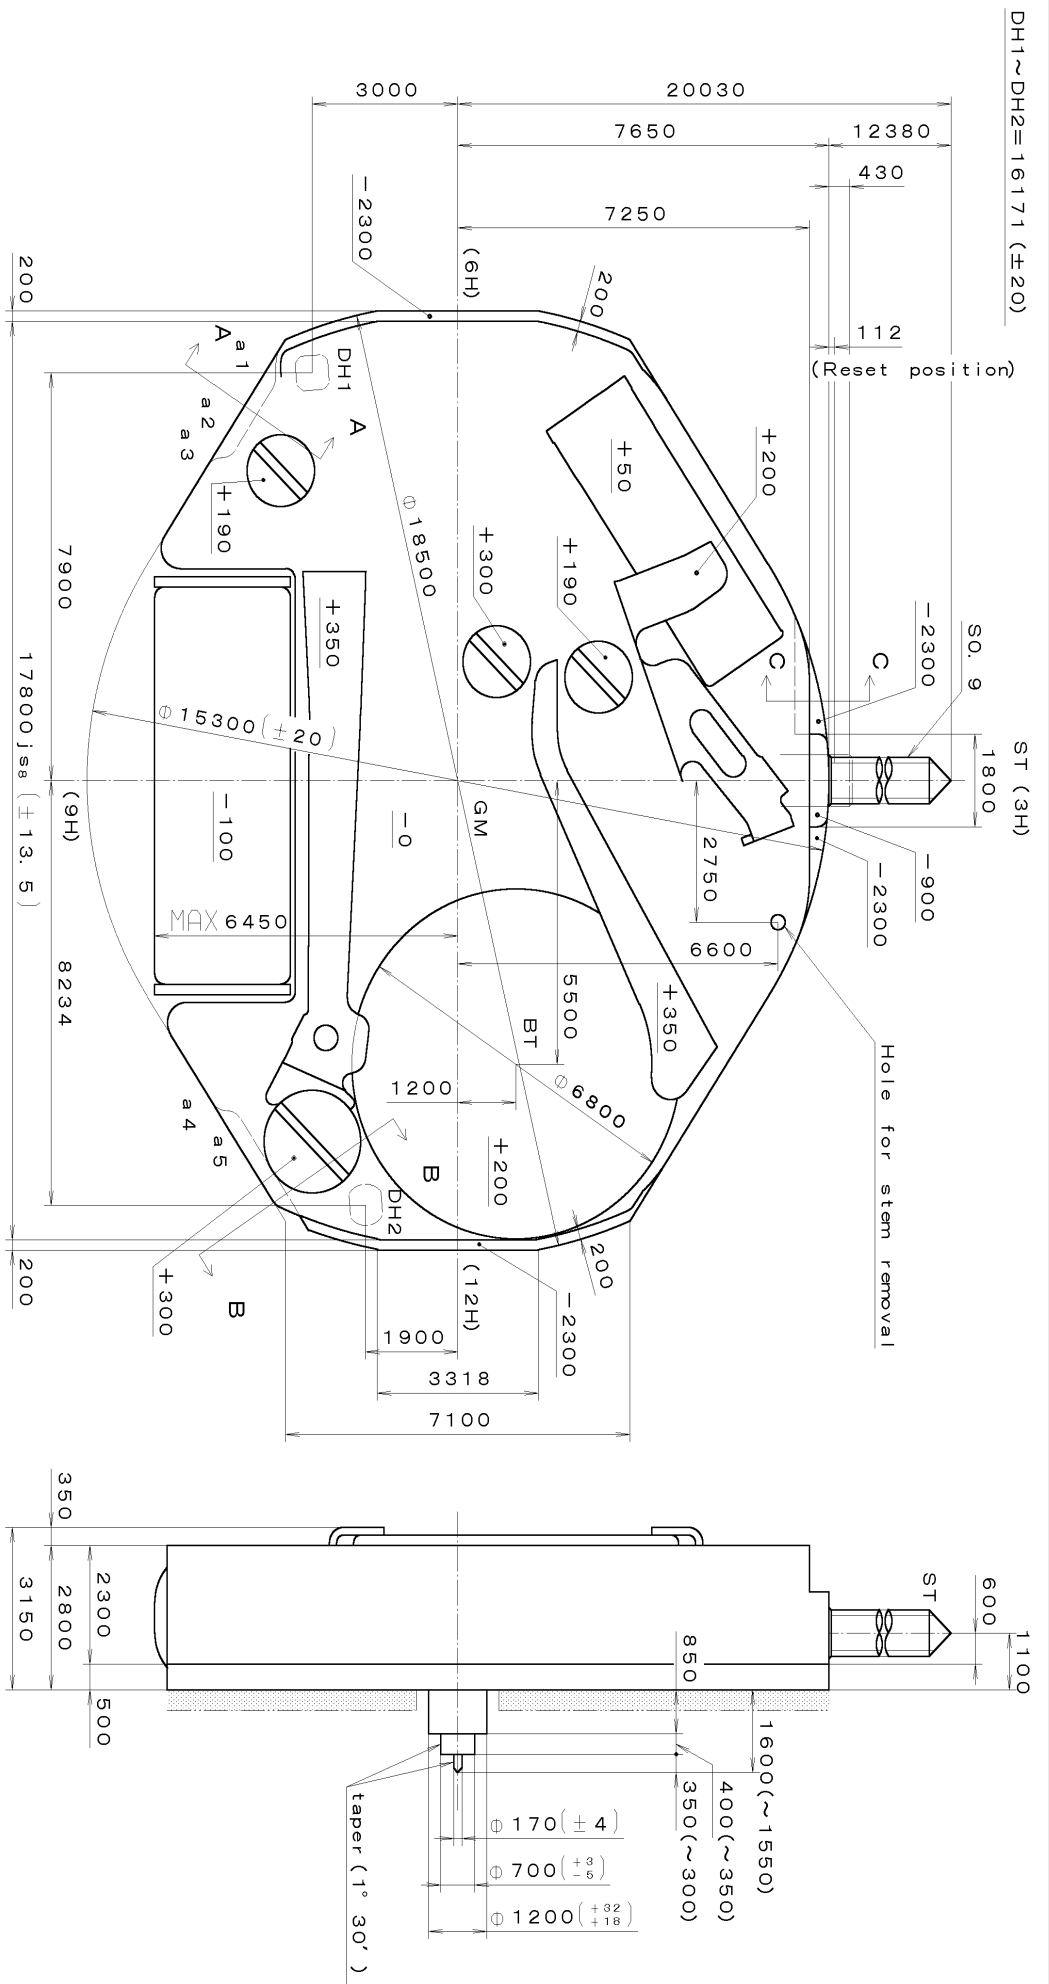

DH1~DH2=16171 (±20)


ST (3H)

Hole for stem removal

taper (1° 30')

Coordinates

Mark	X	Y	R
GM	0	0	
a1	-7838	-4250	500
a2	-6550	-4855	300
a3	-5951	-4888	300
a4	6101	-4790	300
a5	6700	-4756	300

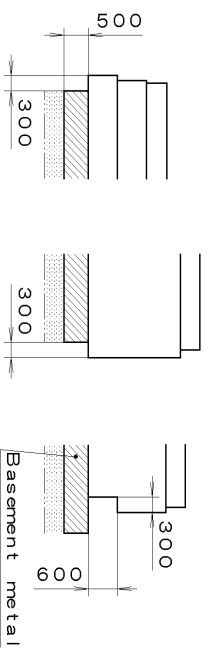


Section A-A Section B-B Section C-C

Quantity	Unit	Cal. No. :
	1/1000 mm	2035
Scale	10:1	Parts:
Date		
Drawn		
Checked	T. Hiruta	Name:
Approved		Frame for Case
		Drawing No. : 2035C000
Material		
Heat Treatment		
Hardness		
Plating		
General Tolerances		
Dimensions		
Angles		

This drawing is provisional and subject to our reconfirmation and/or revision without notice.


*** T I P W 2035-00A (01) *** (2100 1121) 00-08-14

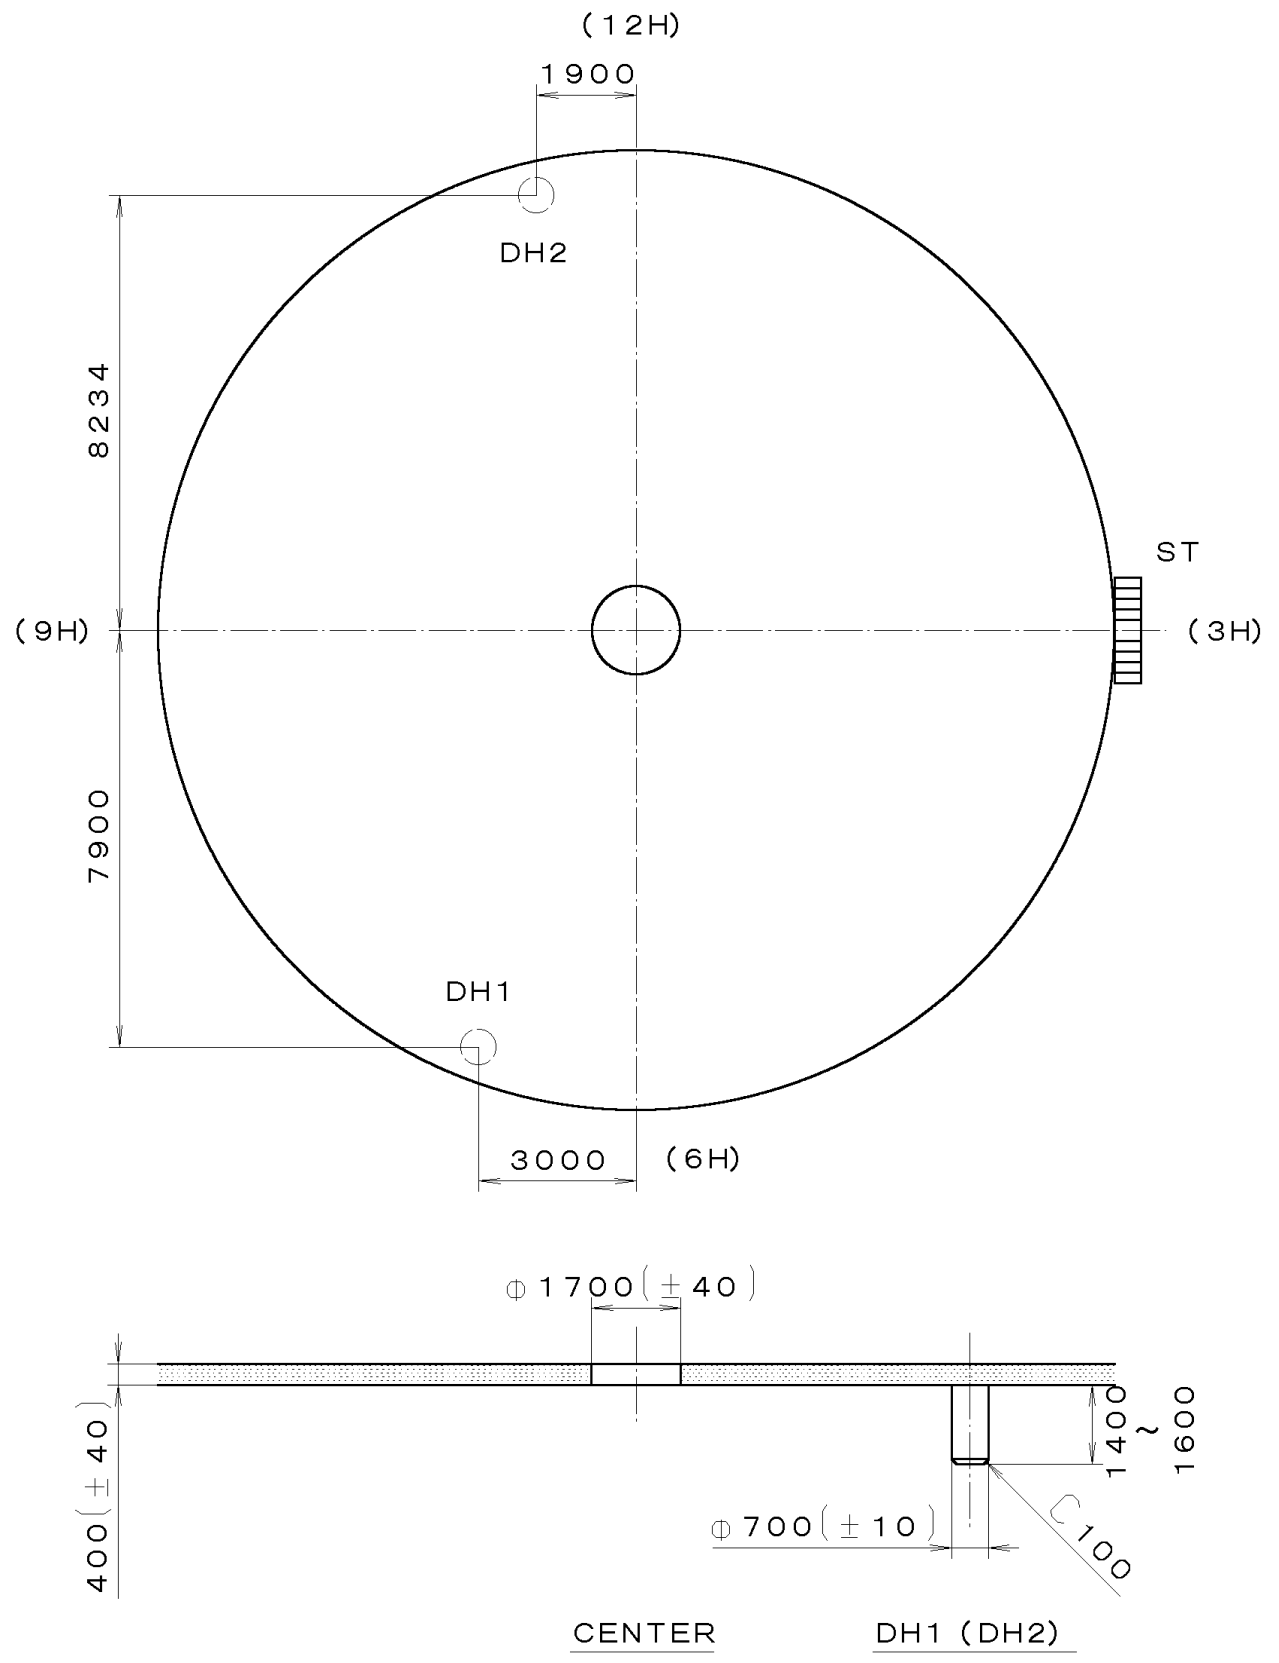

7			Quantity		Ca l. No. : 2035-00A
6			Unit	1/1000 mm	
5			Scale	7:1	Parts:
4			Date		
3			Drawn		
2			Checked	T. Hiruta	Name:
1			Approved		Indications for Dial
Material					Drawing No. : 2035D000
Heat Treatment			General Tolerances		
Hardness			Dimensions		
Plating			Angles		

This drawing is provisional and subject to our reconfirmation and/or revision without notice

*** T I P W (01) *** (2100 1121) 00-07-28 065-468

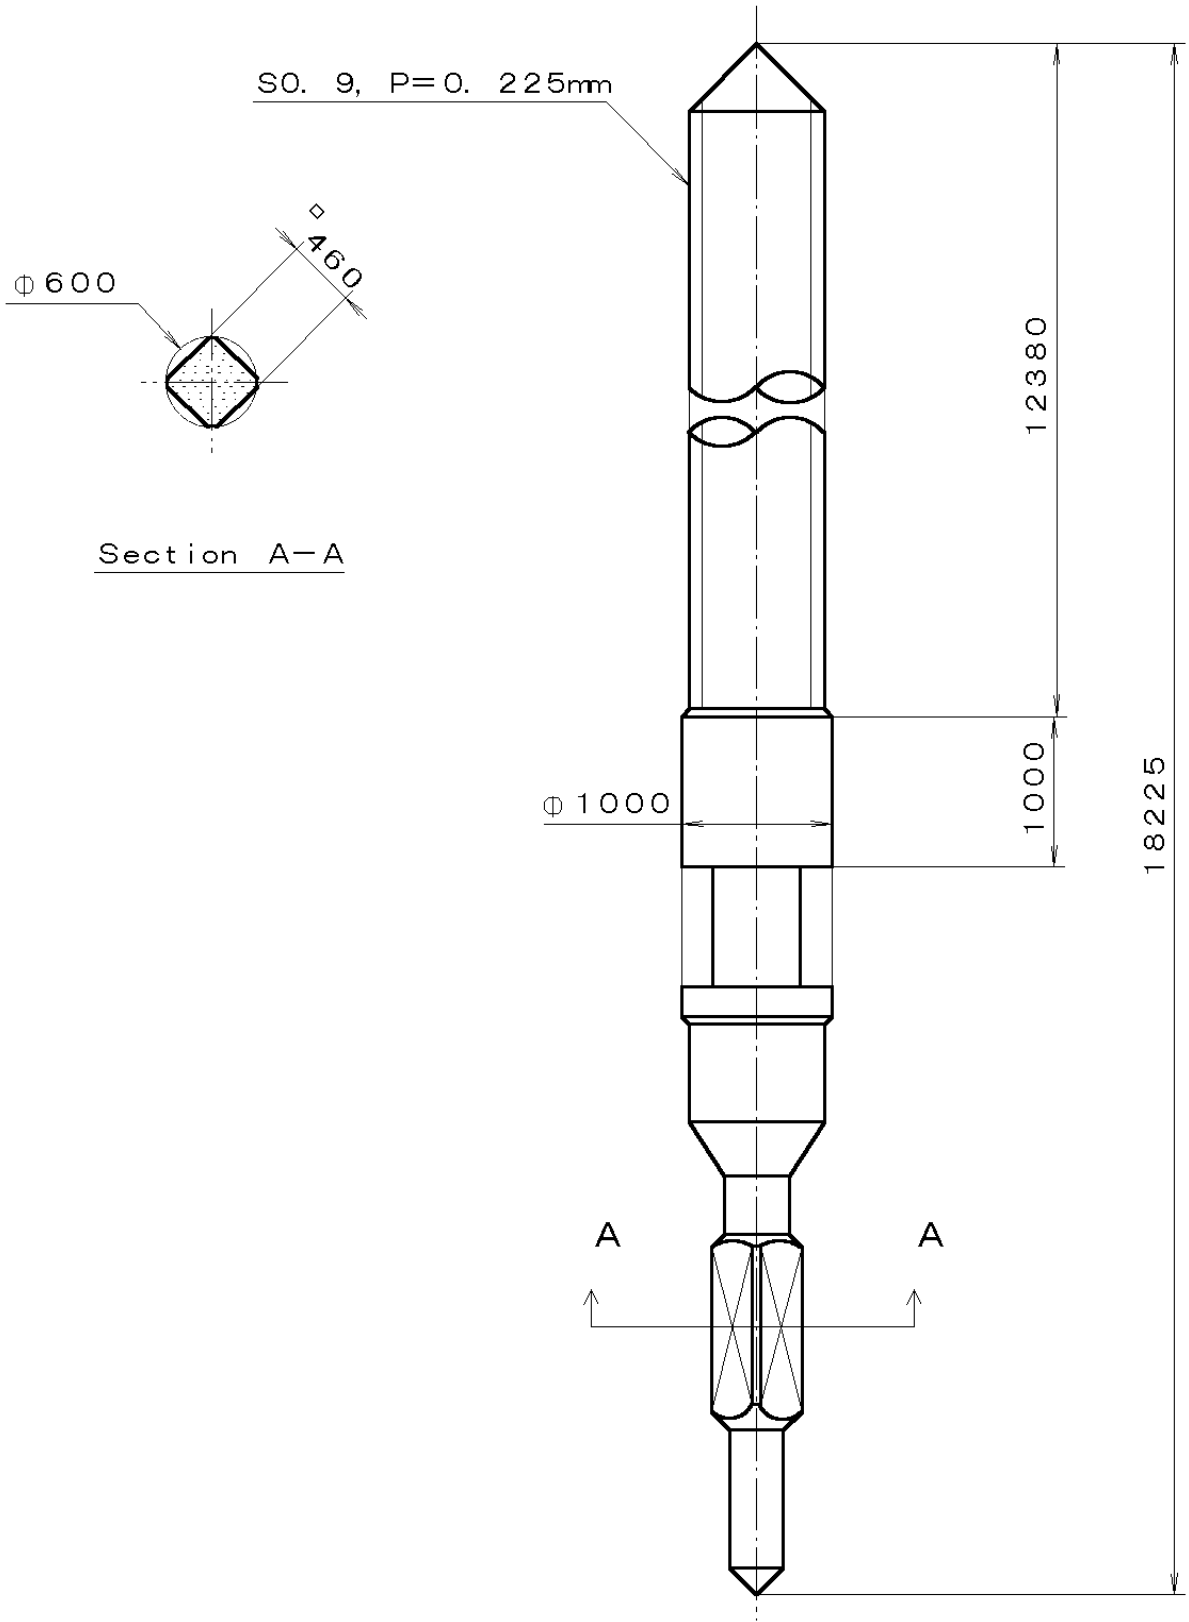

7		Quantity		Cal. No. :
6		Unit	1/1000 mm	Parts : 065-468
5		Scale	20:1	
4		Date		Name : SETTING STEM
3		Drawn		
2		Checked	T. Hiruta	Drawing No. : 4680S000
1		Approved		
Material				
Heat Treatment		General Tolerances		
Hardness		Dimensions		
Plating		Angles		