



Size <ligne>	12 ½”
Height <mm>	4.30
Accuracy <per Month>	±20 sec
Battery Life	2 years

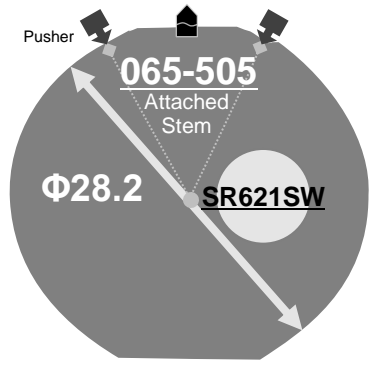


Battery consumption could be minimum by pulling out the stem

Balance Weight <μN.m>	Minute 0.40 Second 0.09 Small 0.02
---------------------------------	--

Featured by Shock Detection

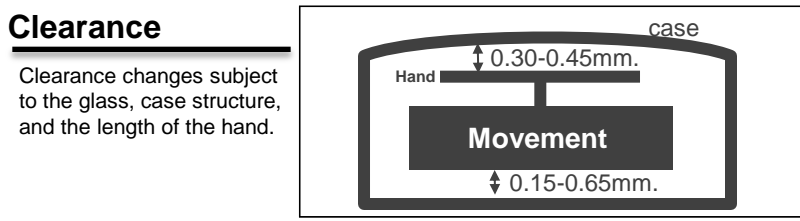

Original Package	500pcs
-------------------------	--------

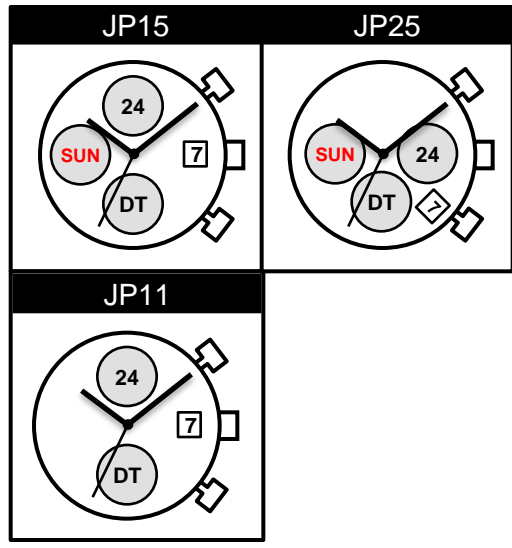

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.


Push "A"
The hand of Dual Time forward in units of 15 minutes

Setting the Time and Day

Push "B"
The hand of Dual Time Back in units of 15 minutes

Setting the Date
DO NOT set Date between 9:00pm - 1:00am


This drawing is provisional and subject to our reconfirmation and/or revision without notice.

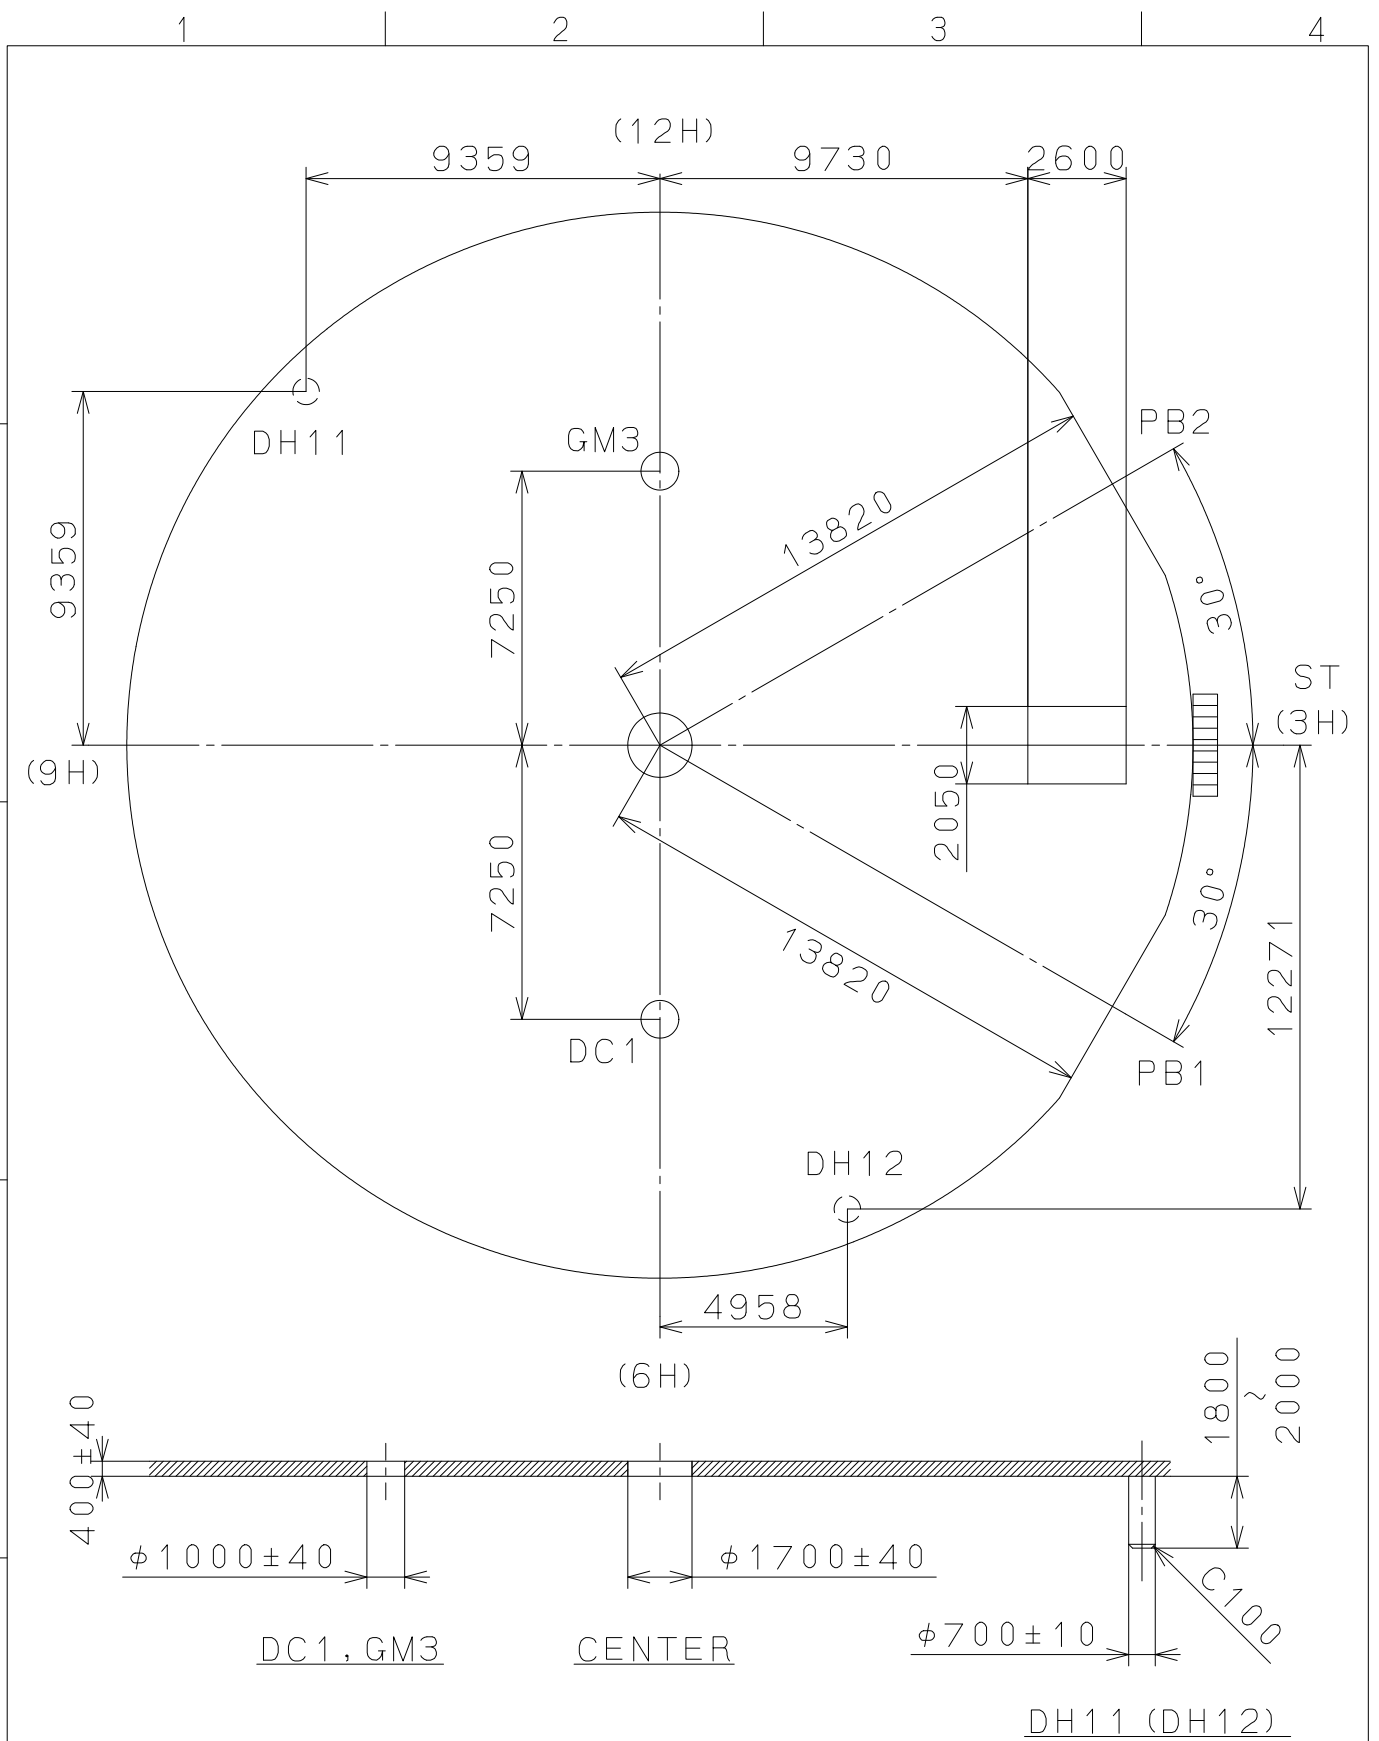

△			Quantity		Cal.NO.:
△			Unit	1/1000 _{mm}	JP11-00C
△			Scale	5:1	Parts No.:
△			Date		
△			Drawn		
Mark	Date	Description	Appr.	Checked	M. Kobayashi
Alterations			Approved	Name:	
Material					Indications for Dial
Heat Treatment					Drawing No.: JP11D000
Hardness					MIYOTA
Plating					

2006/12/25 (07:50:10)

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

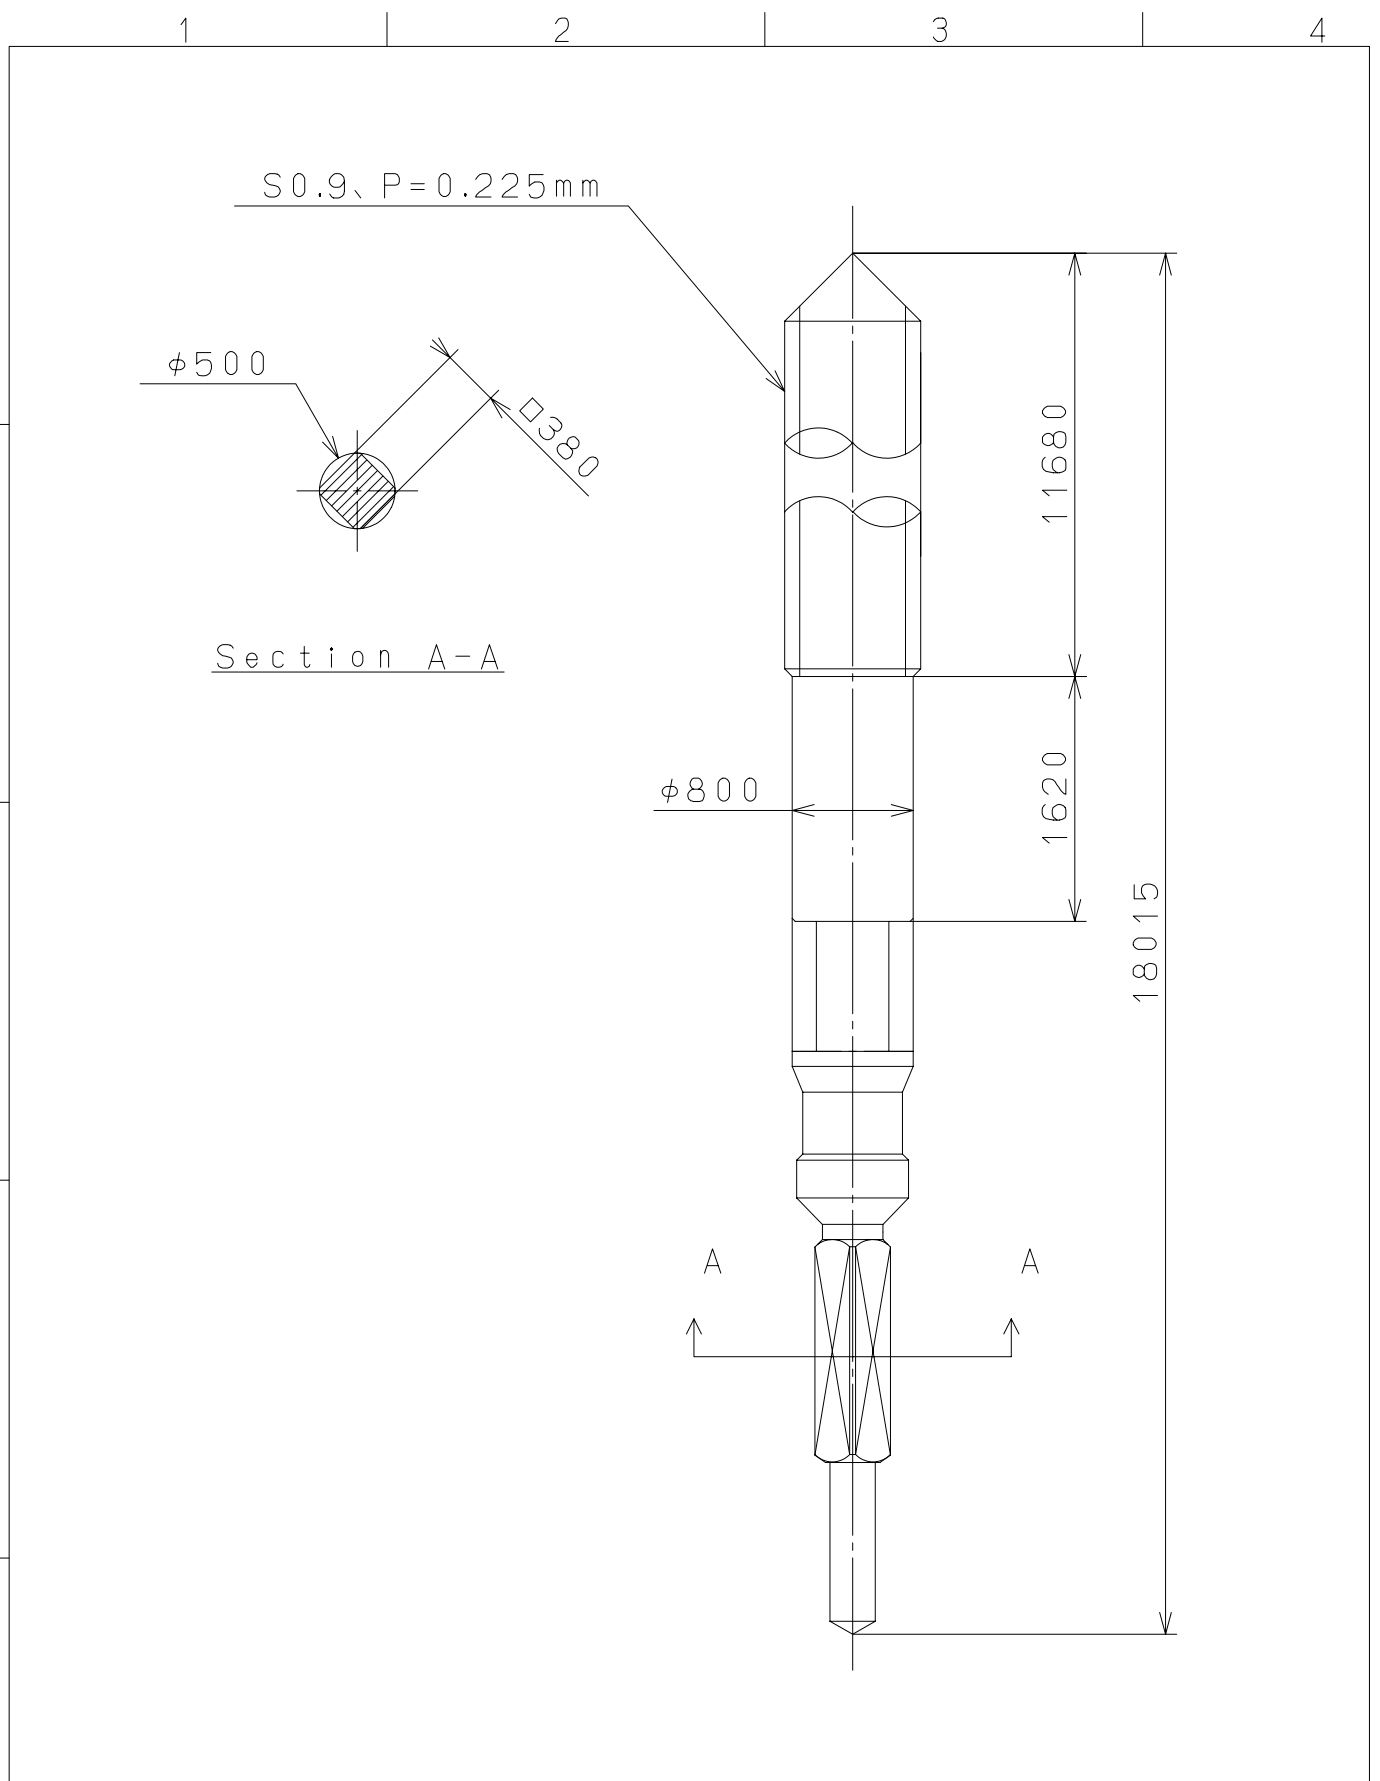

⑤			Quantity		Cal.NO.:
④			Unit	1 / 1000 mm	
③			Scale	20 / 1	Parts No.:
②			Date		065-505
①			Drawn		
Mark	Date	Description	Appr.	Checked	Name:
		Alterations		Approved	SETTING STEM
Material					Drawing No.: 5050S000
Heat Treatment				General Tolerances	MIYOTA
Hardness				Dimensions	
Plating				Angles	
					CITIZEN WATCH CO., LTD. TOKYO, JAPAN