


CARY® steel plug gauges TDH type.

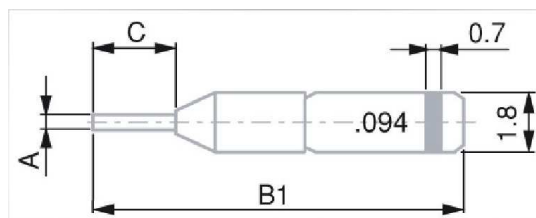

Ø A mm	B1 mm	C mm
0.050...0.109	10.3	0.8
0.110...0.159	10.5	1.0
0.060...0.209	10.7	1.4
0.210...0.309	11.1	1.6

MSA	Ø	Progression	Kg
15.032-x.xxx *	0.050...0.080 mm	0.002 mm (even sizes)	0.013
15.033-x.xxx *	0.051...0.079 mm	0.002 mm (uneven sizes)	0.013
15.034-x.xxx *	0.081...0.309 mm	0.002 mm (uneven sizes)	0.013
15.035-x.xxx *	0.082...0.308 mm	0.002 mm (even sizes)	0.013

CARY® steel plug gauge TDH type.
The most convenient and fastest method to check the small diameter holes. Because of their small size, it is necessary to use tweezers for their handling. Standard accuracy : ± 0.4 µm.


* Specify the exact diameter when ordering



MSA	Size	Kg
15.072	48 x 30 x 22 mm	0.022

Metal box for 10 CARY® plug gauges TDH type from Ø 0.050 to 0.309 mm.

CARY® steel plug gauges TLH type.

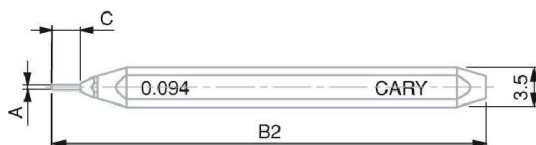

Ø A mm	B2 mm	C mm
0.050...0.109	31.8	0.8
0.110...0.159	32.0	1.0
0.060...0.209	32.2	1.4
0.210...0.309	32.6	1.6

MSA	Ø	Progression	Kg
15.021-x.xxx *	0.050...0.080 mm	0.002 mm (even sizes)	0.003
15.020-x.xxx *	0.051...0.079 mm	0.002 mm (uneven sizes)	0.003
15.022-x.xxx *	0.081...0.309 mm	0.002 mm (uneven sizes)	0.003
15.023-x.xxx *	0.082...0.308 mm	0.002 mm (even sizes)	0.003

CARY® steel plug gauge TLH type.
The TLH type is identical to the TDH type, but with a 30 mm-long handle. Standard accuracy : ± 0.4 µm.

* Specify the exact diameter when ordering




MSA	Size	Kg
15.068	80 x 82 x 47 mm	0.145

Wooden box for 25 CARY® plug gauges TLH type from Ø 0.050 to 0.309 mm.

Delivered without gauges.

CARY® steel simple plugs gauge TXH type.

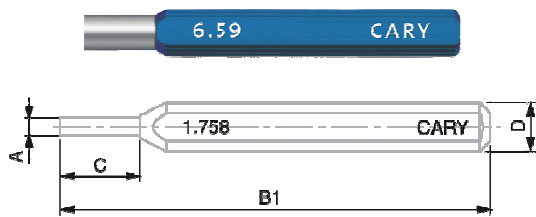

Ø A mm	B1 mm	C mm	D mm
0.300...0.509	38	3	3.5
0.510...1.009	39	4	3.5
1.010...1.509	40	5	3.5
1.510...2.009	46	6	5
2.010...2.509	47	7	5
2.510...3.009	48	8	5
3.010...3.509	49	9	5
3.510...4.009	60	10	8
4.010...5.009	61	11	8
5.010...10.010	62	12	8

MSA	Ø	Progression	Kg
15.026-x.xxx *	0.300...1.508 mm	0.002 mm (even sizes)	0.003
15.024-x.xxx *	0.301...1.509 mm	0.002 mm (uneven sizes)	0.003
15.029-x.xxx *	1.510...3.508 mm	0.002 mm (even sizes)	0.004
15.027-x.xxx *	1.511...3.509 mm	0.002 mm (uneven sizes)	0.004
15.031-x.xxx *	3.510...10.000 mm	0.002 mm (even sizes)	0.007
15.030-x.xxx *	3.511...9.999 mm	0.002 mm (uneven sizes)	0.007

CARY® steel simple plug gauge TXH type.

Standard accuracy from Ø 0.300 to 3.000 mm : ± 0.4 µm.

Standard accuracy from Ø 3.000 to 10.000 mm : ± 0.5 µm.

* Specify the exact diameter when ordering



MSA	Size	Kg
15.069 (1)	135 x 85 x 60 mm	0.240
15.070 (2)	135 x 85 x 60 mm	0.545

Wooden box for 50 CARY® plug gauges TLH type.

(1) from Ø 0.300 to 1.509 mm

(2) from Ø 1.510 to 3.509 mm

(1)